MODEL

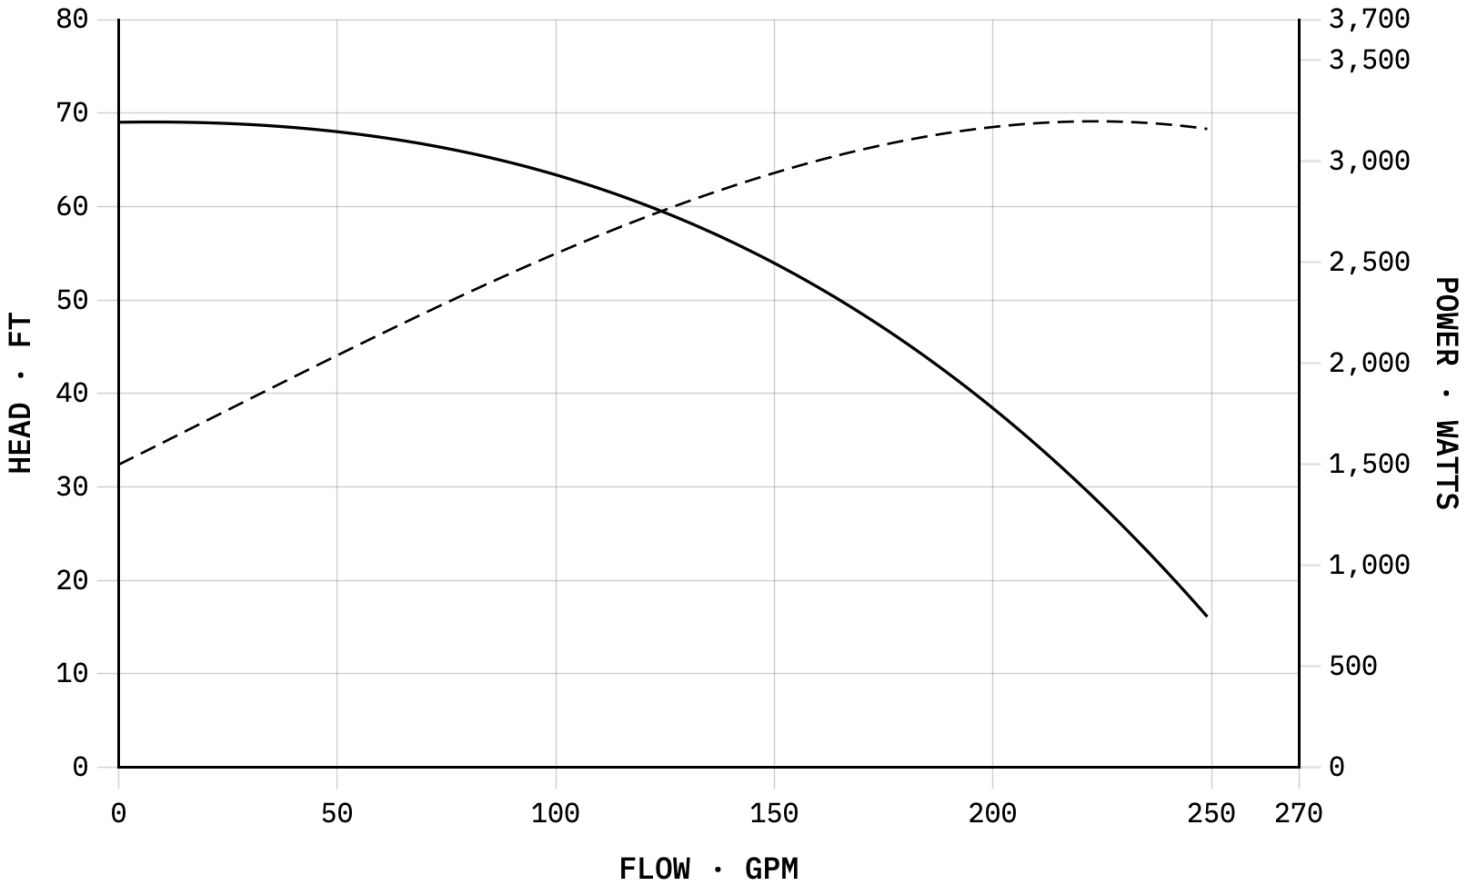
A22-4500-7S-T2M6G-GMV

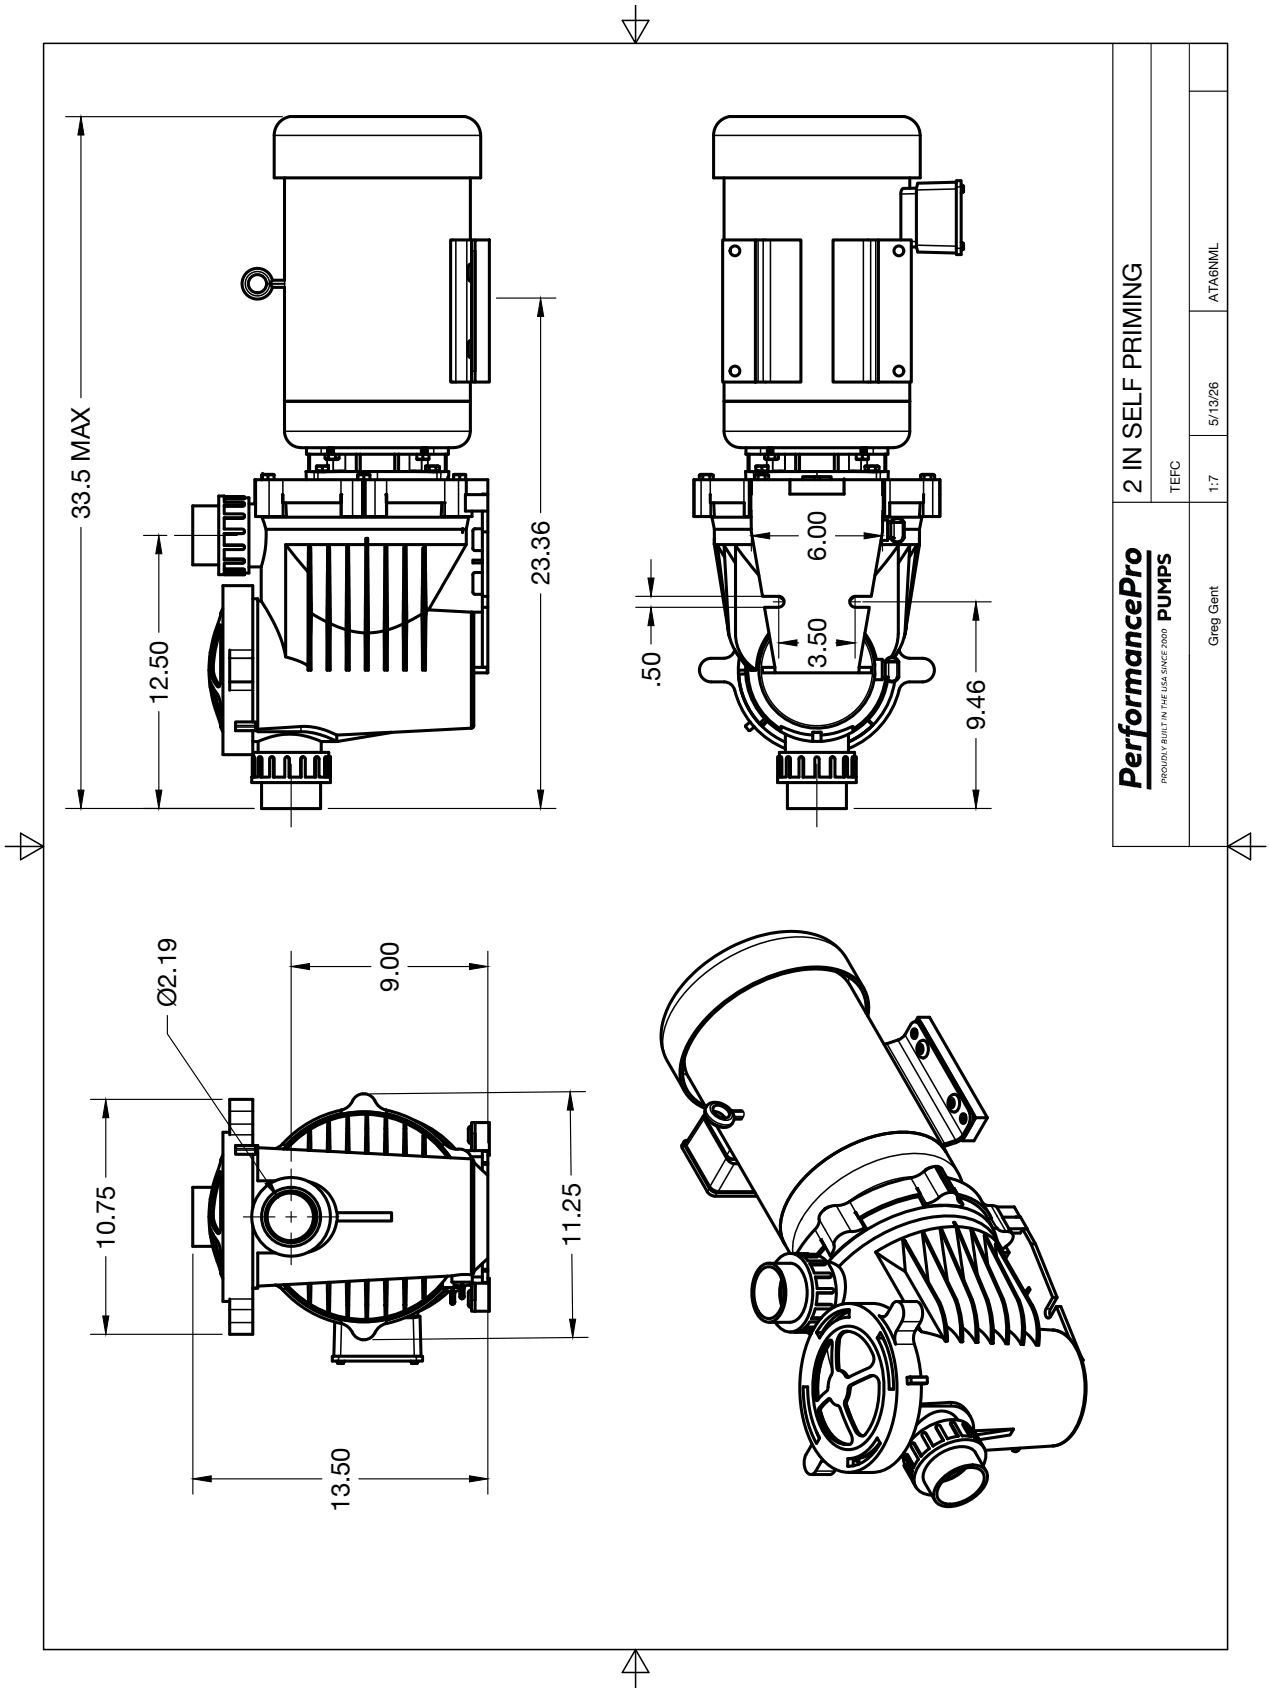
TEST NO. 1549

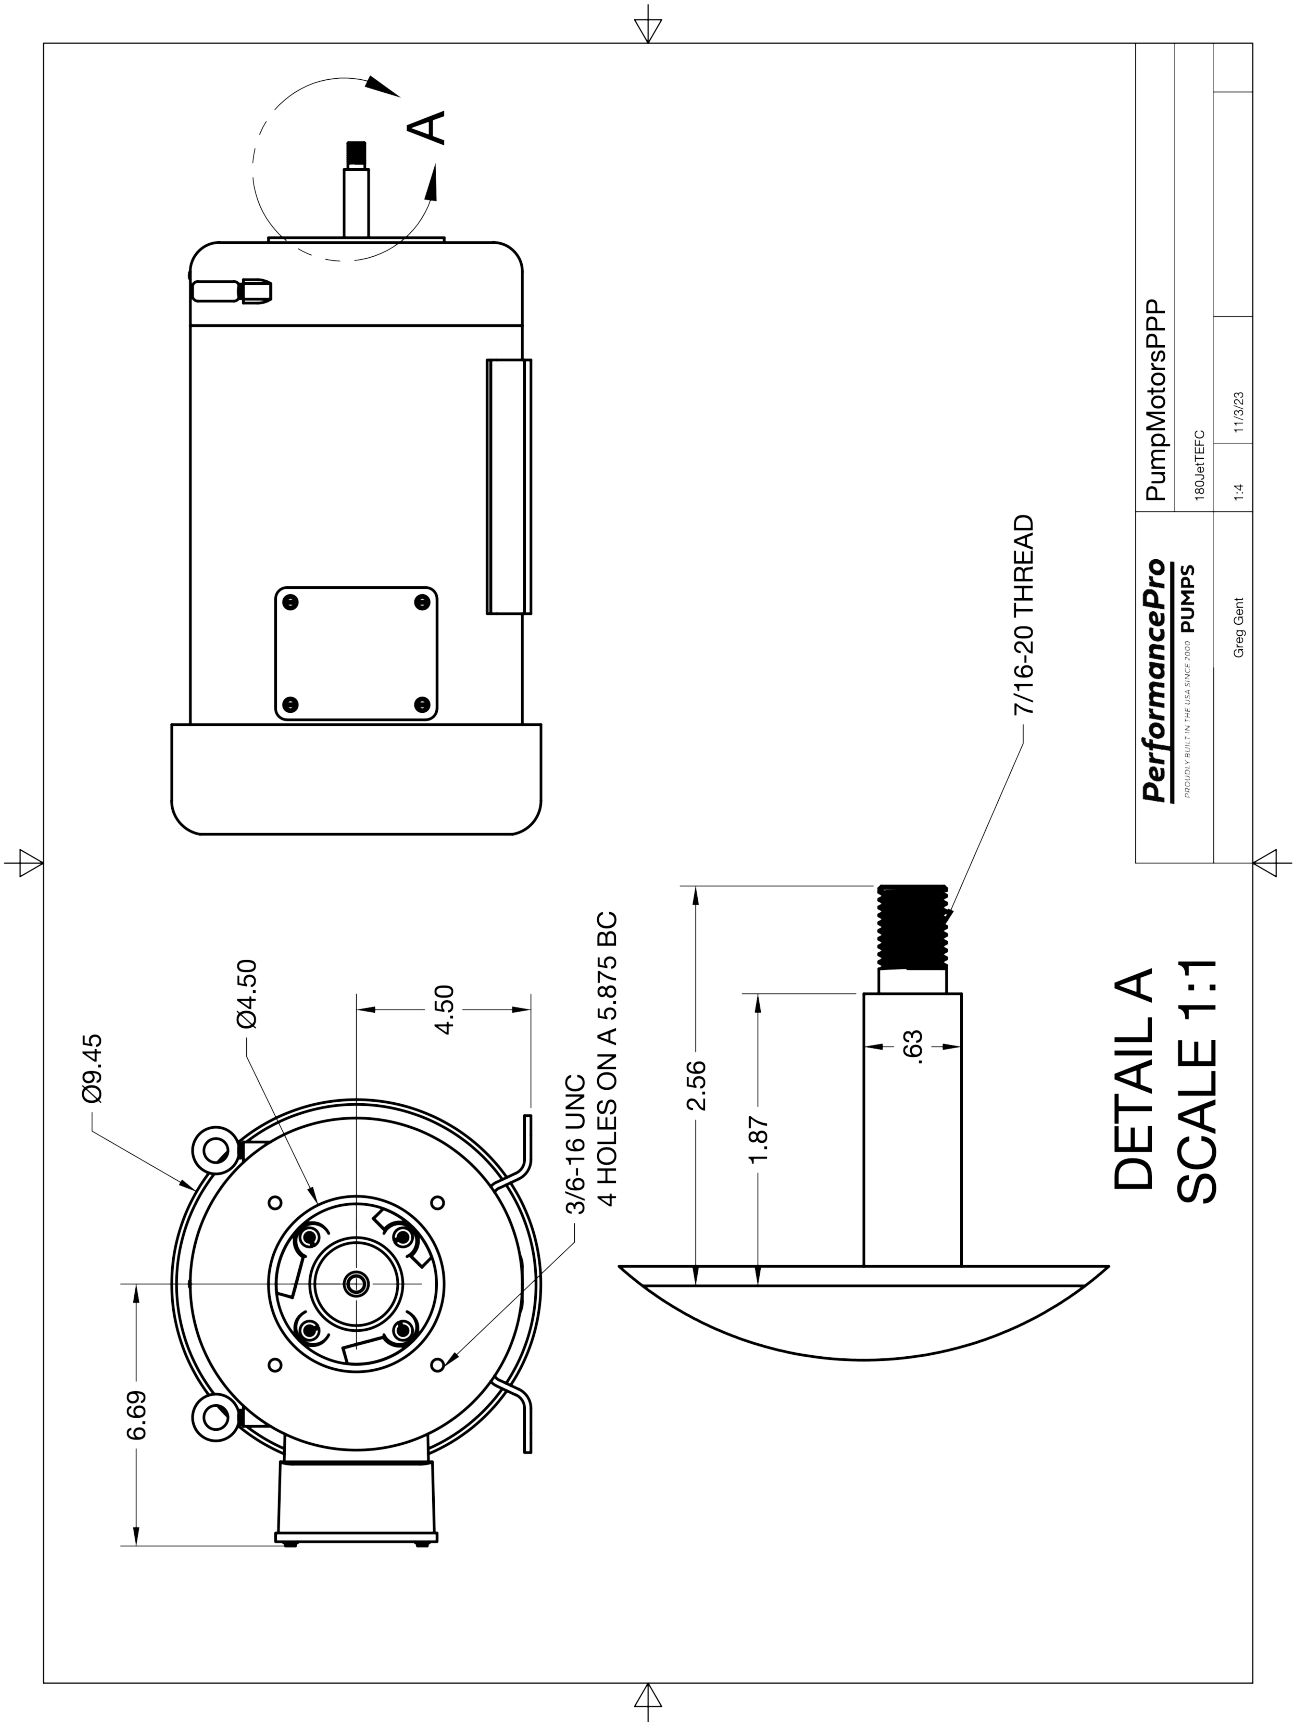
2 IN SELF PRIMING

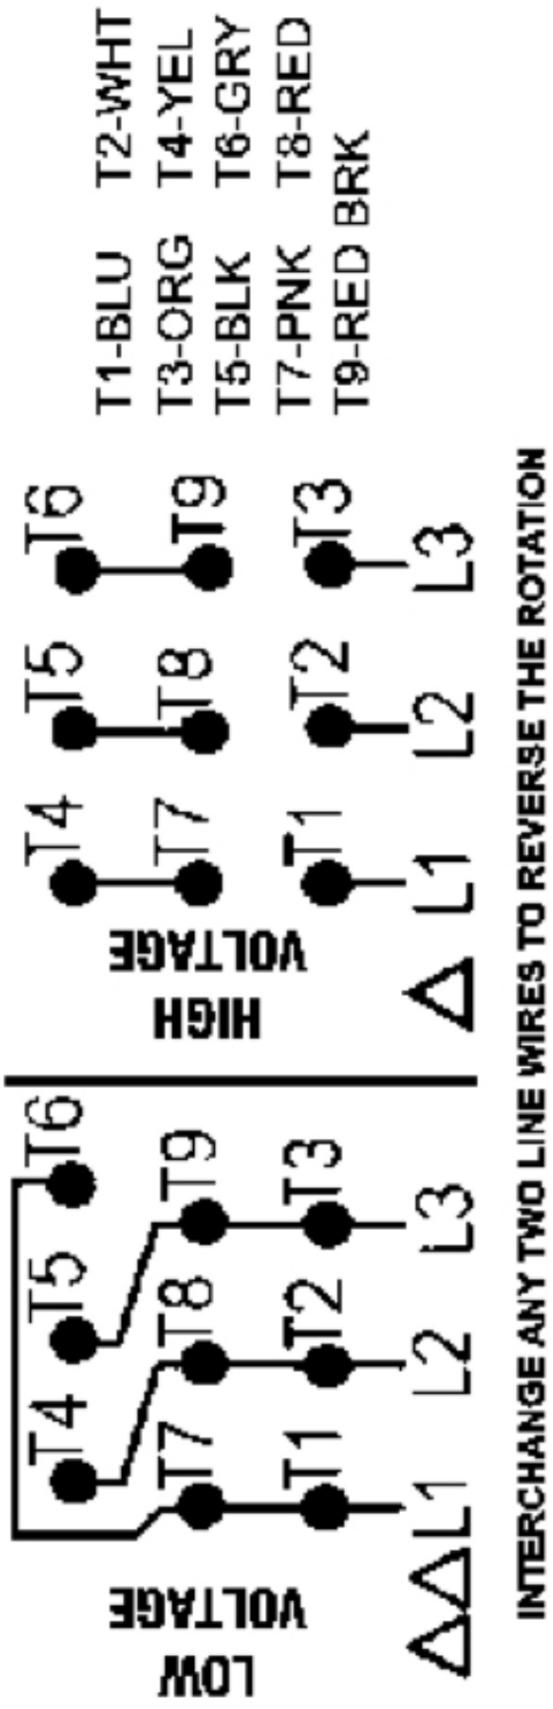
PUMP DATA	
MAX FLOW	249
MAX HEAD	69.0
MAX POWER	3196
IMPELLER	AP3/4L
TRIM	4.5

MOTOR DATA	
MOTOR NUMBER	CPM-429
HP	5
ENCLOSURE	TEFC
RPM	3500
VOLTAGE	230/460
CURRENT	11.8/5.90
PHASE	3
FREQUENCY	60
FRAME	180J (Shaft Mod)




33.5 MAX
12.50
23.36
6.00
3.50
.50
9.46
Ø2.19
9.00
10.75
11.25
13.50
2 IN SELF PRIMING
TEFC
1:7
5/13/26
ATA6NML
PerformancePro
PROUDLY BUILT IN THE USA SINCE 2000 PUMPS
Greg Gent


A
7/16-20 THREAD
Ø9.45
Ø4.50
4.50
3/6-16 UNC
4 HOLES ON A 5.875 BC
6.69
2.56
1.87
.63
DETAIL A
SCALE 1:1
PumpMotorsPPP
180JetTEFC
1:4
11/3/23
Greg Gent
PerformancePro
PUMPS


T1-BLU
T3-ORG
T5-BLK
T7-PNK
T9-RED BRK
T2-WHT
T4-YEL
T6-GRY
T8-RED
T6
T9
T3
T5
T8
T2
T4
T7
T1
L3
L2
L1
HIGH VOLTAGE
Δ
T6
T9
T3
T5
T8
T2
T4
T7
T1
L3
L2
L1
ΔΔ
LOW VOLTAGE
INTERCHANGE ANY TWO LINE WIRES TO REVERSE THE ROTATION