MODEL

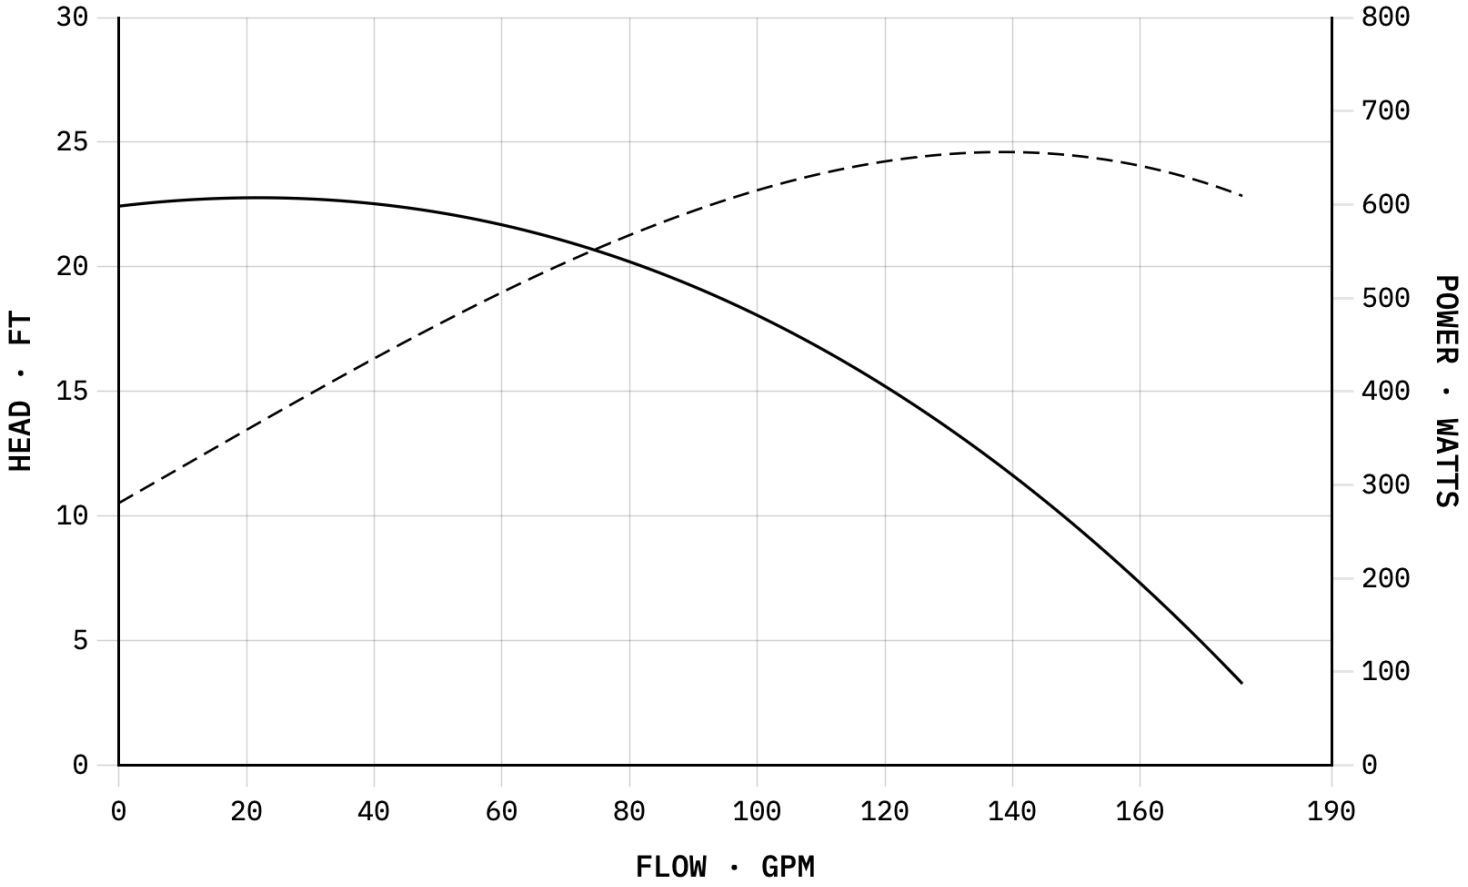
B22-4890-7S-T4E6G-GMV

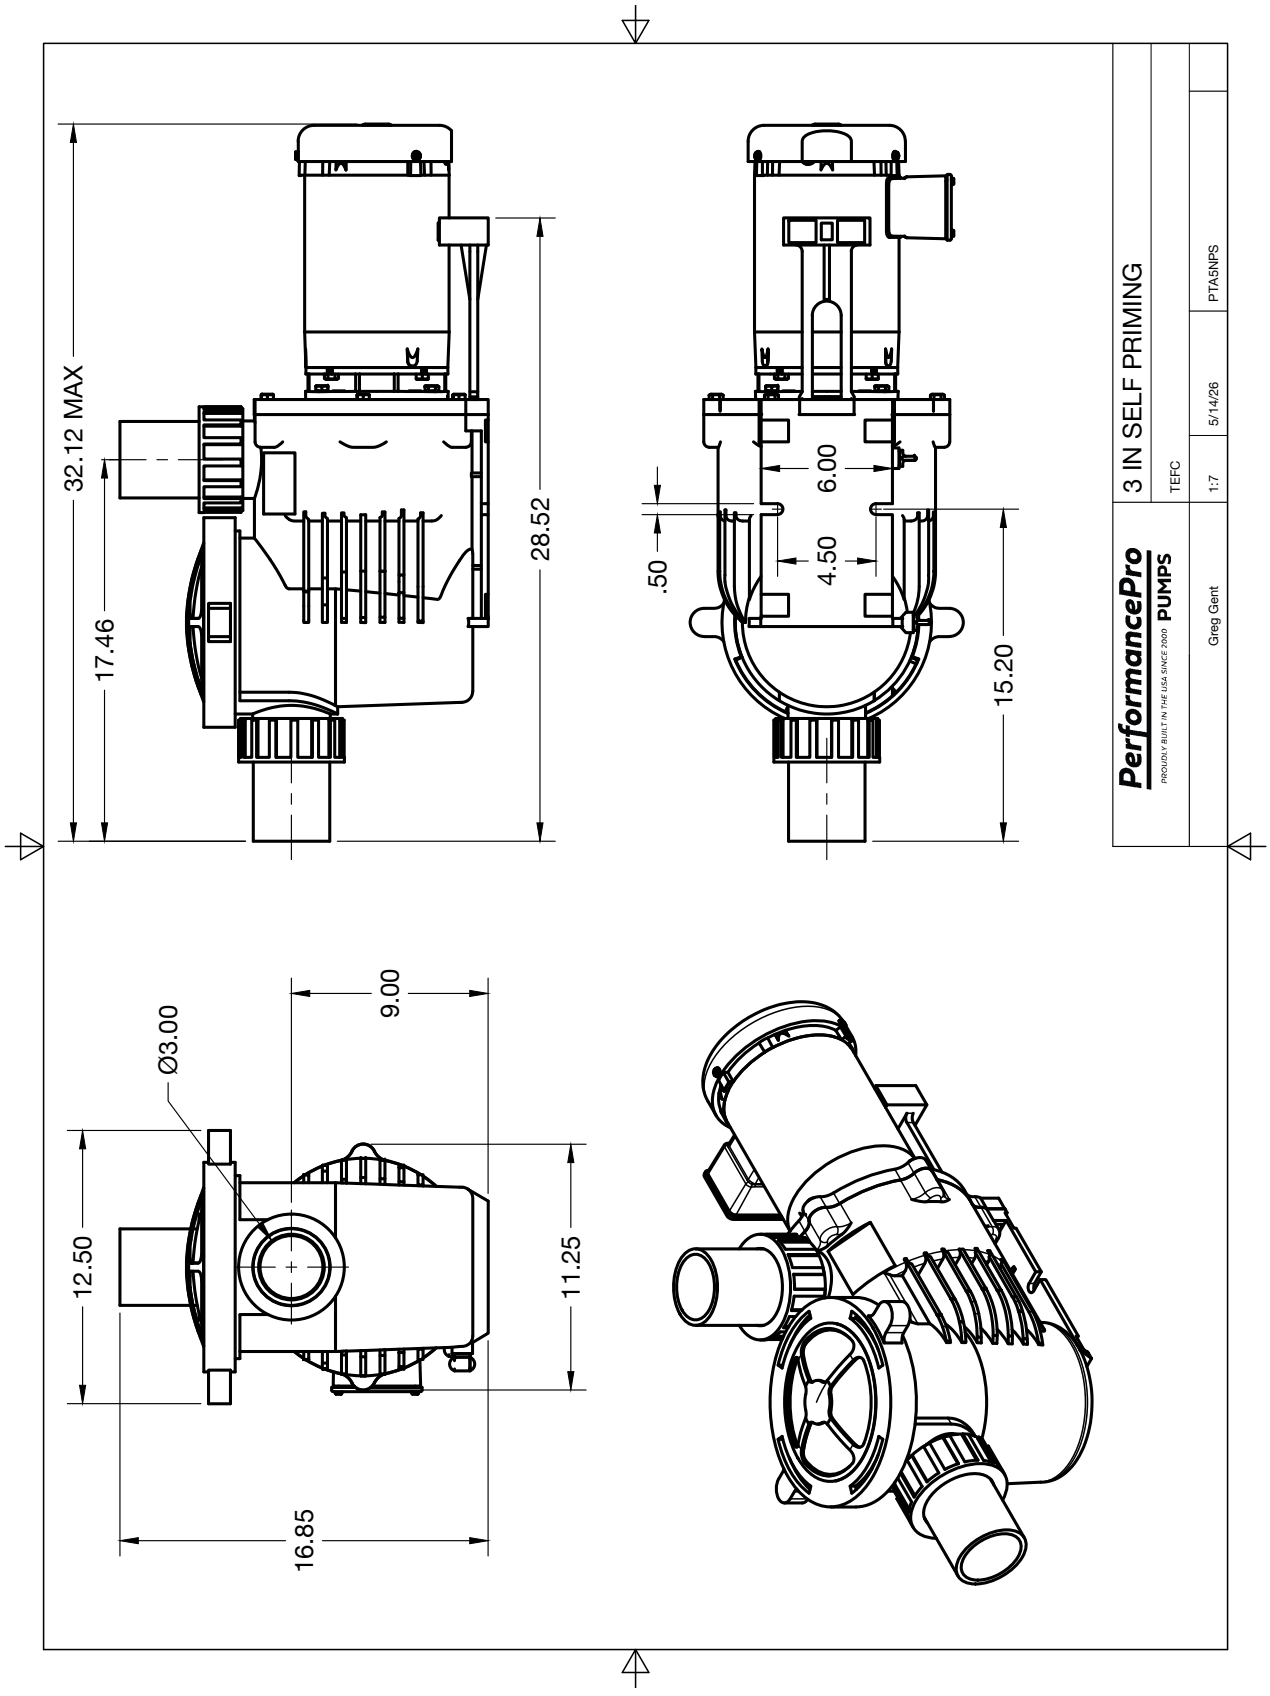
TEST NO. 1571

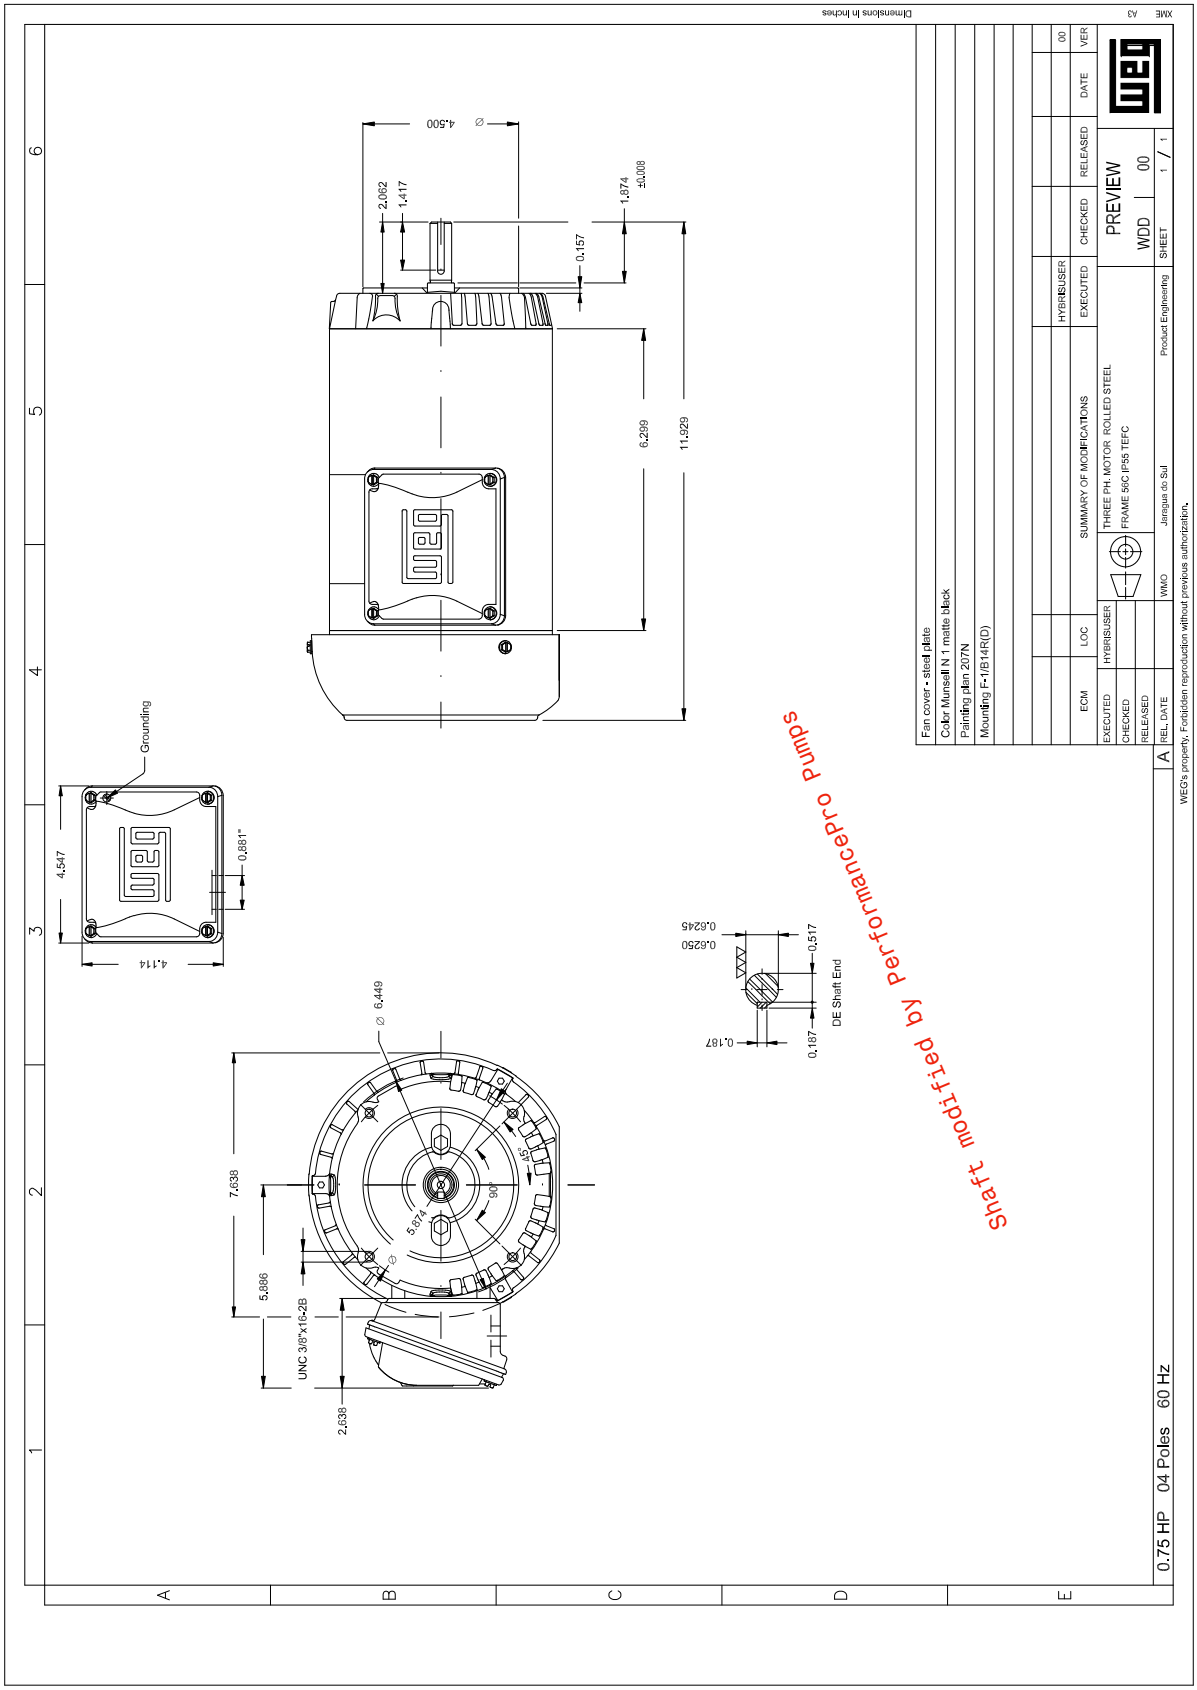
3 IN SELF PRIMING

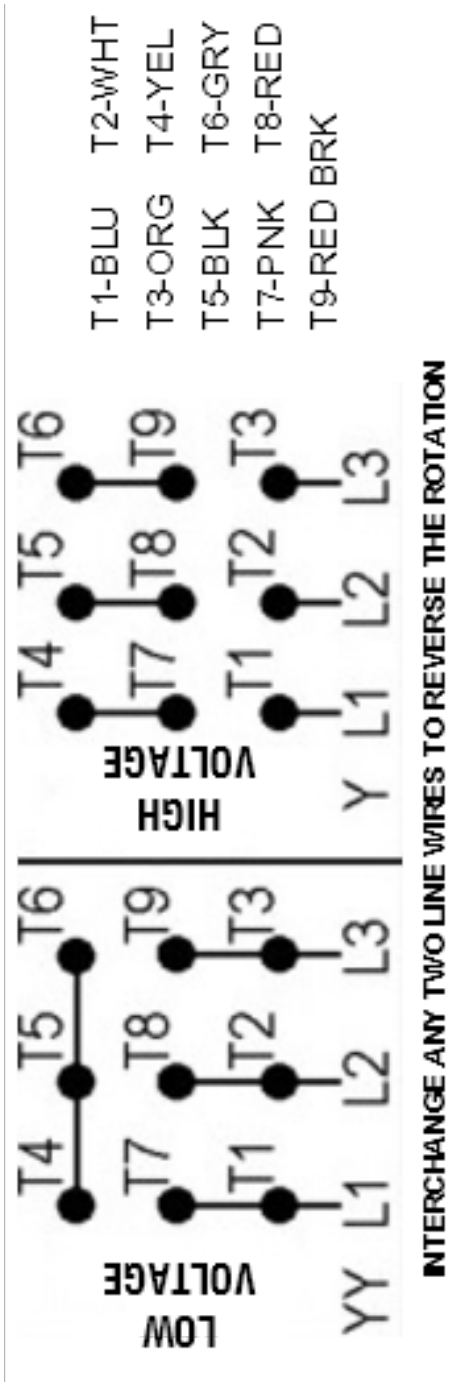
PUMP DATA	
MAX FLOW	176
MAX HEAD	22.4
MAX POWER	656
IMPELLER	AP3/4L
TRIM	4.89

MOTOR DATA	
MOTOR NUMBER	CPM-447
HP	0.75
ENCLOSURE	TEFC
RPM	1755
VOLTAGE	230/460
CURRENT	2.44/1.22
PHASE	3
FREQUENCY	60
FRAME	56J (Shaft Mod)




32.12 MAX
17.46
28.52
6.00
.50
4.50
15.20
9.00
Ø3.00
12.50
11.25
16.85
3 IN SELF PRIMING
TEFC
1:7
5/14/26
PTA5NPS
PerformancePro
PROUDLY BUILT IN THE USA SINCE 2000 PUMPS
Greg Gent


Dimensions in inches
XME A3
Fan cover - steel plate
Color Munsell N 1 matte black
Painting plan 207N
Mounting F-1/B14R(D)
SUMMARY OF MODIFICATIONS
ECM
LOC
EXECUTED
CHECKED
RELEASED
REL. DATE
HYBRIDUSER
VMO
Jaraguá do Sul
Product Engineering
THREE PH. MOTOR ROLLED STEEL
FRAME 56C IP55 TEFC
PREVIEW
WDD 00
SHEET 1 / 1
DATE
VER
00
0.75 HP 04 Poles 60 Hz
WEG's property. Forbidden reproduction without previous authorization.
Grounding
4.547
0.881"
4.114
4.500 Ø
2.062
1.417
1.874 ±0.008
0.157
6.299
11.929
0.6245
0.6250
0.517
0.187
0.187
DE Shaft End
Ø 6.449
7.638
5.886
UNC 3/8"x16-2B
2.638
5.874
45°
90°
Shaft modified by Performancepro Pumps


T1-BLU T2-WHT
T3-ORG T4-YEL
T5-BLK T6-GRY
T7-PNK T8-RED
T9-RED BRK
HIGH VOLTAGE
T4 T5 T6
T7 T8 T9
T1 T2 T3
Y L1 L2 L3
LOW VOLTAGE
T4 T5 T6
T7 T8 T9
T1 T2 T3
YY L1 L2 L3
INTERCHANGE ANY TWO LINE WIRES TO REVERSE THE ROTATION