MODEL

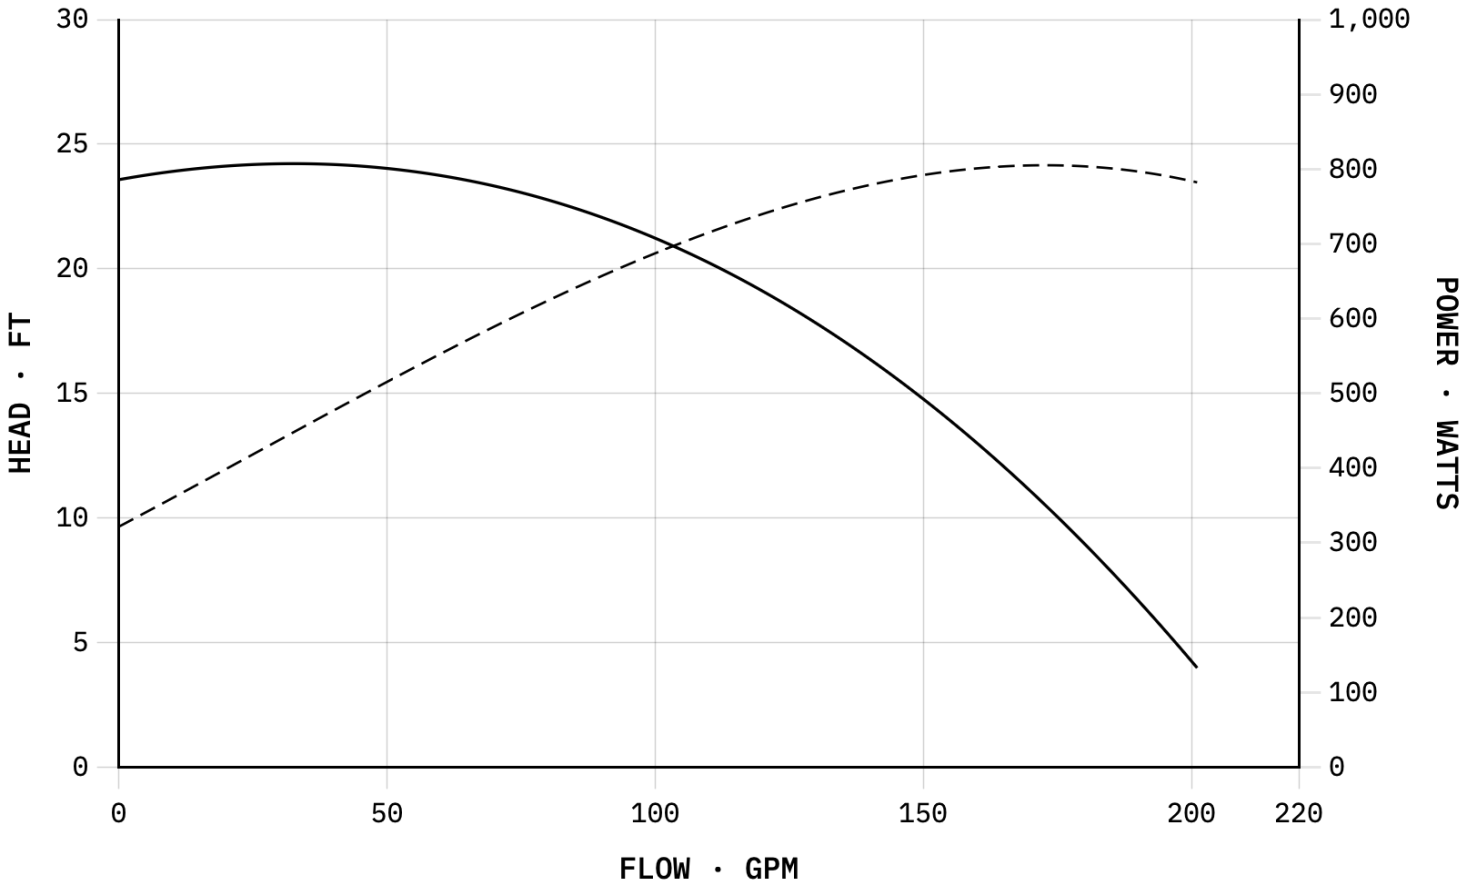
B23-4890-7S-T4F6G-GMV

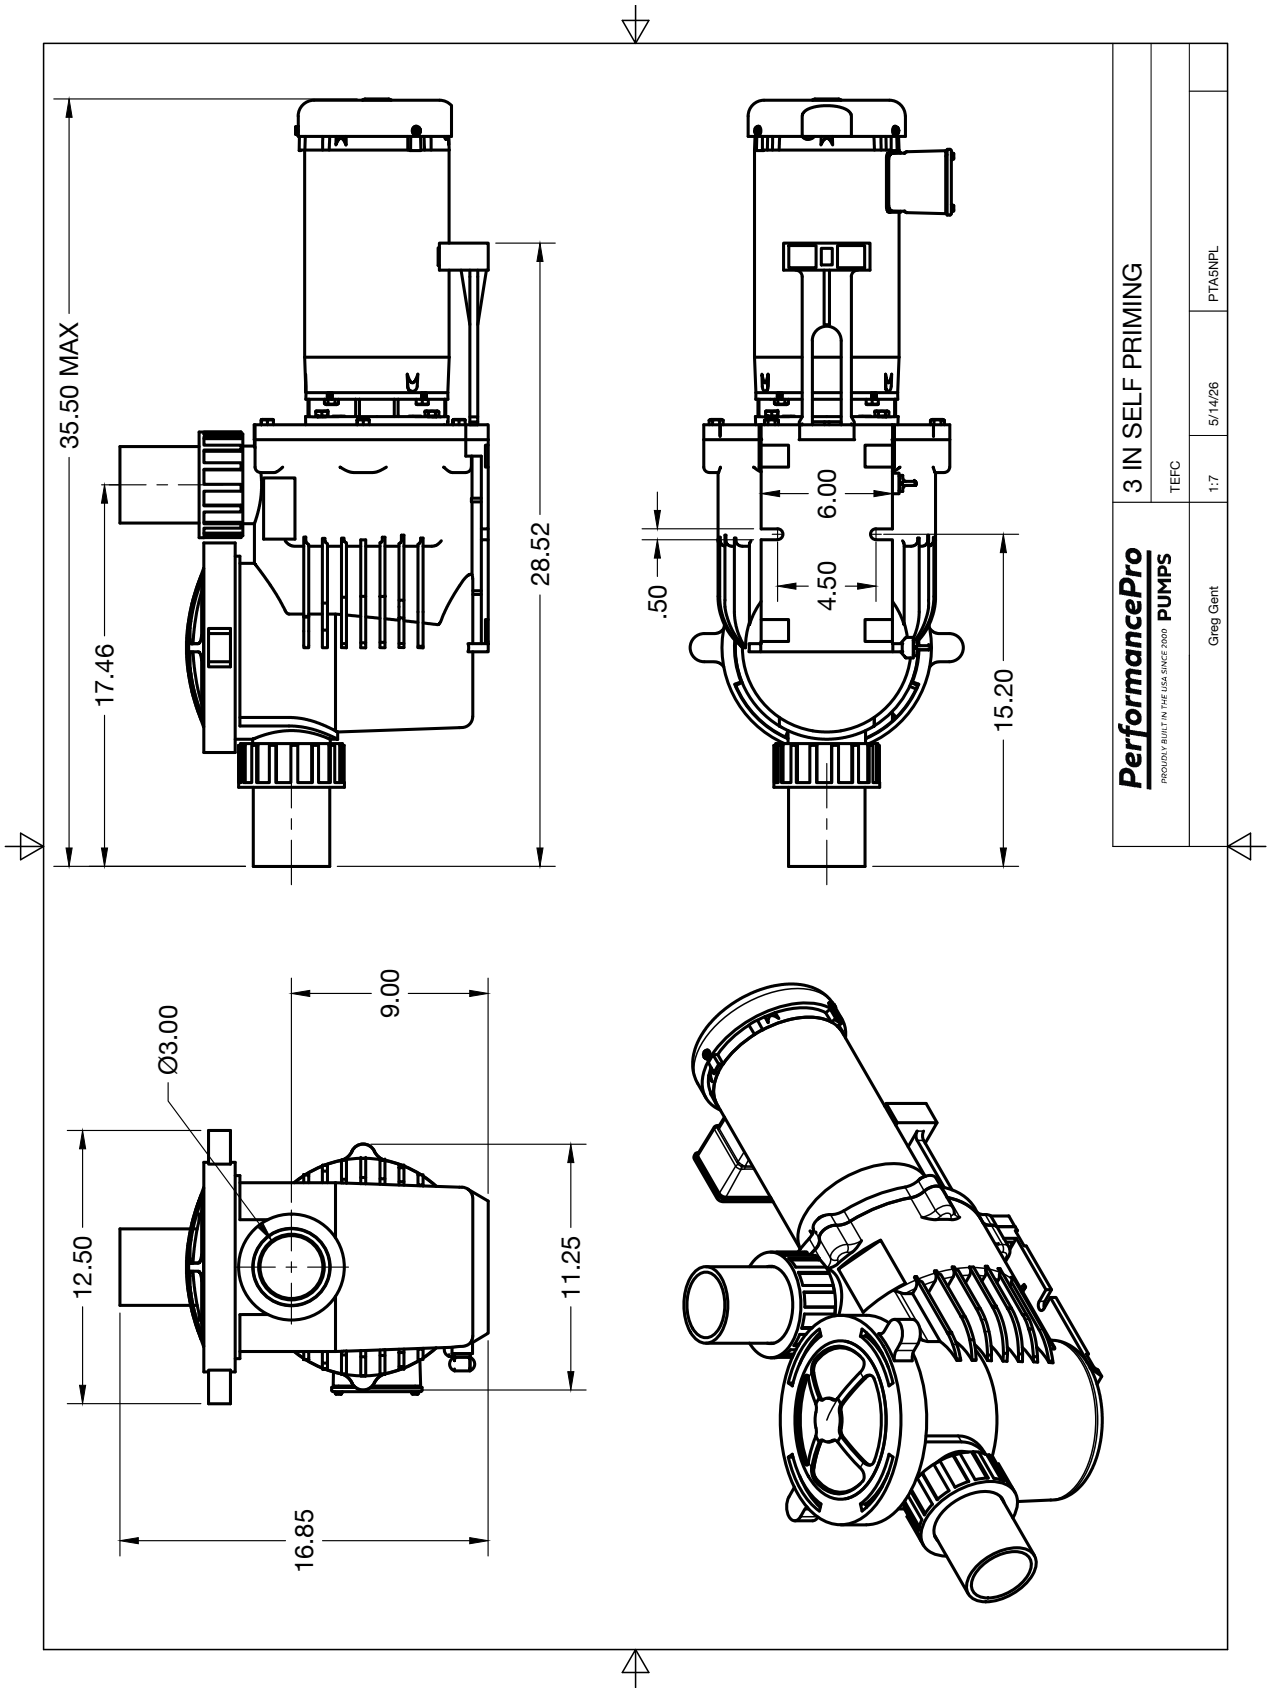
TEST NO. 1577

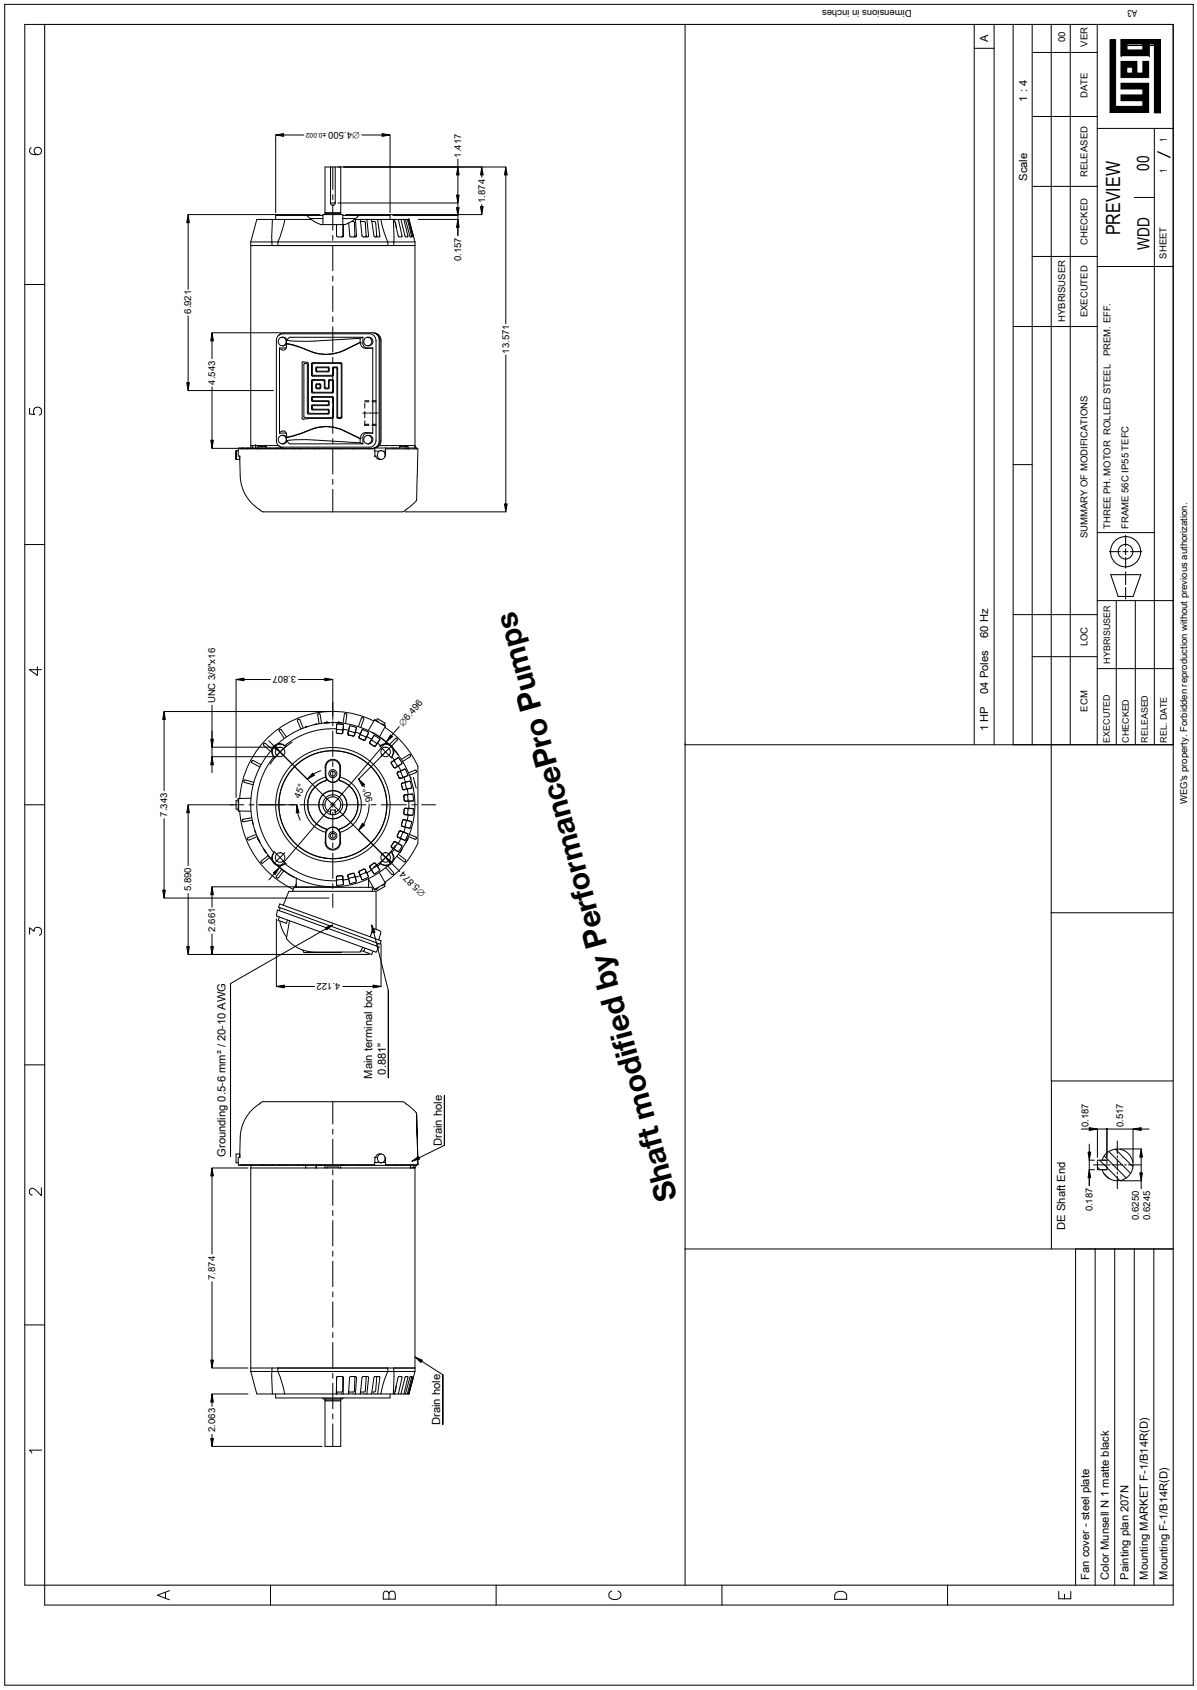
3 IN SELF PRIMING

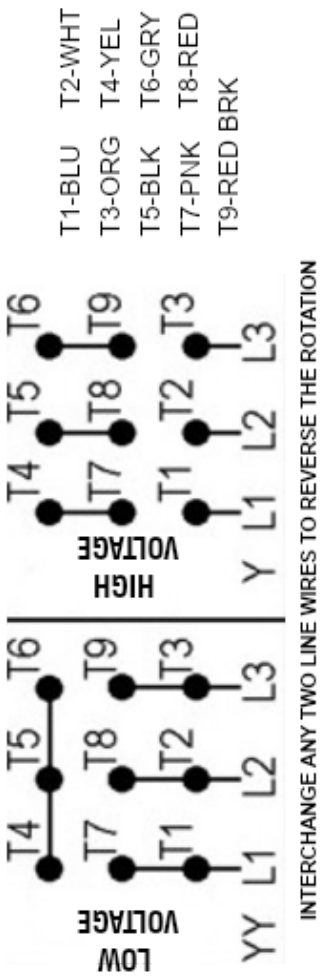
PUMP DATA	
MAX FLOW	201
MAX HEAD	23.6
MAX POWER	805
IMPELLER	AP1L
TRIM	4.89

MOTOR DATA	
MOTOR NUMBER	CPM-448
HP	1
ENCLOSURE	TEFC
RPM	1765
VOLTAGE	230/460
CURRENT	2.94/1.47
PHASE	3
FREQUENCY	60
FRAME	56J (Shaft Mod)




35.50 MAX
17.46
28.52
6.00
4.50
.50
15.20
9.00
Ø3.00
12.50
11.25
16.85
3 IN SELF PRIMING
TEFC
1:7
5/14/26
PTA5NPL
PerformancePro
PROUDLY BUILT IN THE USA SINCE 2000 PUMPS
Greg Gent


Shaft modified by PerformancePro Pumps
1 HP 04 Poles 60 Hz
PREVIEW
WDD 00
THREE PH. MOTOR ROLLED STEEL PREM. EFF.
FRAME 56C IP55 TEFC
Fan cover - steel plate
Color Munsell N 1 matte black
Painting plan 207N
Mounting MARKET F-1/B14R(D)
Mounting F-1/B14R(D)
Drain hole
Main terminal box
Grounding 0.5-6 mm² / 20-10 AWG
UNC 3/8"x16
DE Shaft End
WEG's property. Forbidden reproduction without previous authorization.


T1-BLU T2-WHT
T3-ORG T4-YEL
T5-BLK T6-GRY
T7-PNK T8-RED
T9-RED BRK
HIGH VOLTAGE
Y L1 L2 L3
T4 T7 T1 T5 T8 T2 T6 T9 T3
LOW VOLTAGE
YY L1 L2 L3
T4 T7 T1 T5 T8 T2 T6 T9 T3
INTERCHANGE ANY TWO LINE WIRES TO REVERSE THE ROTATION