MODEL

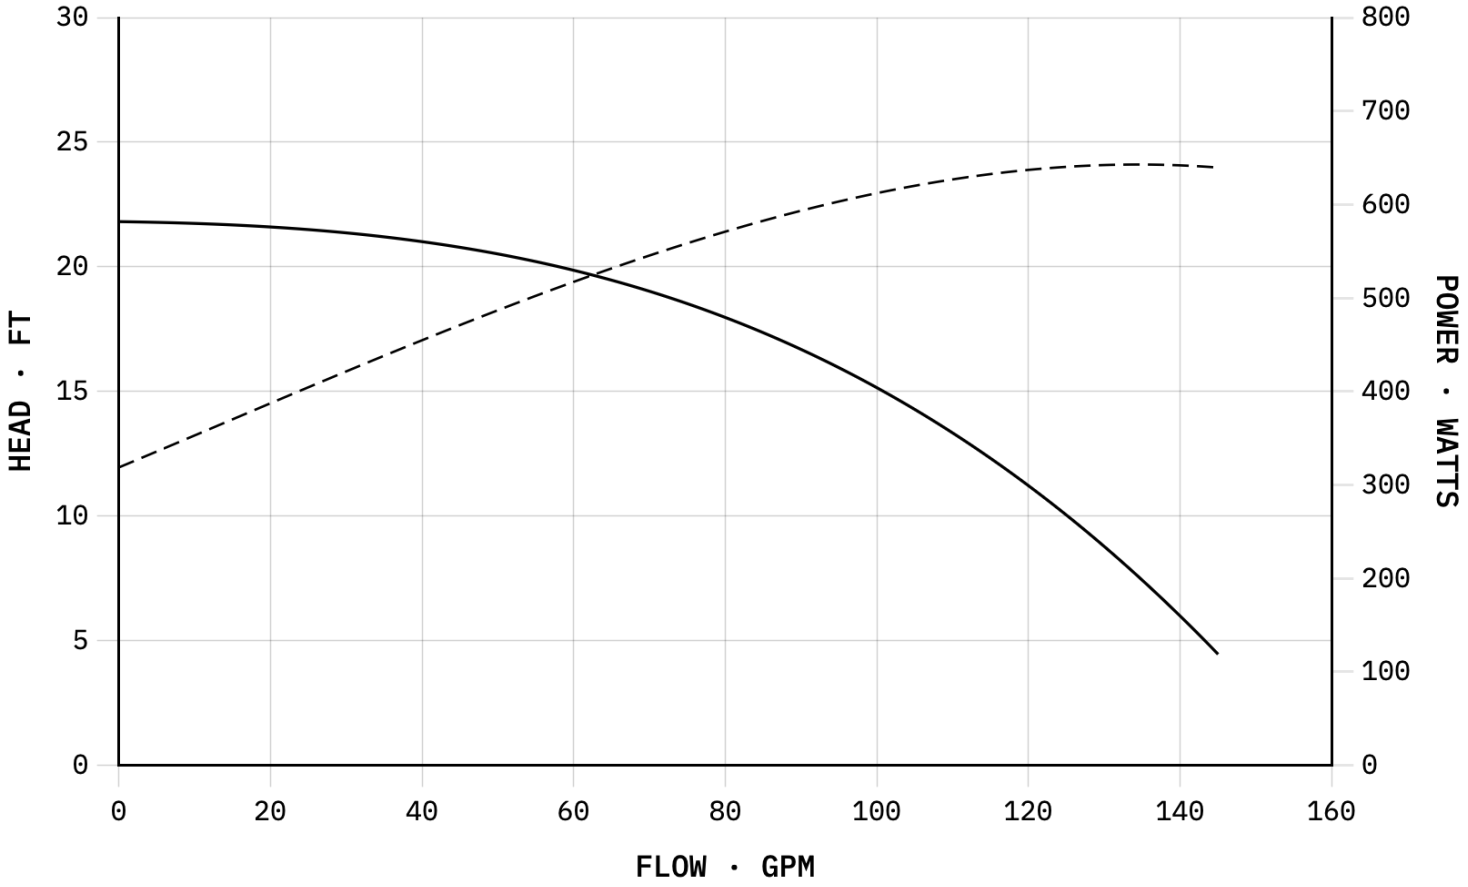
A22-4900-7S-T4E6G-GMV

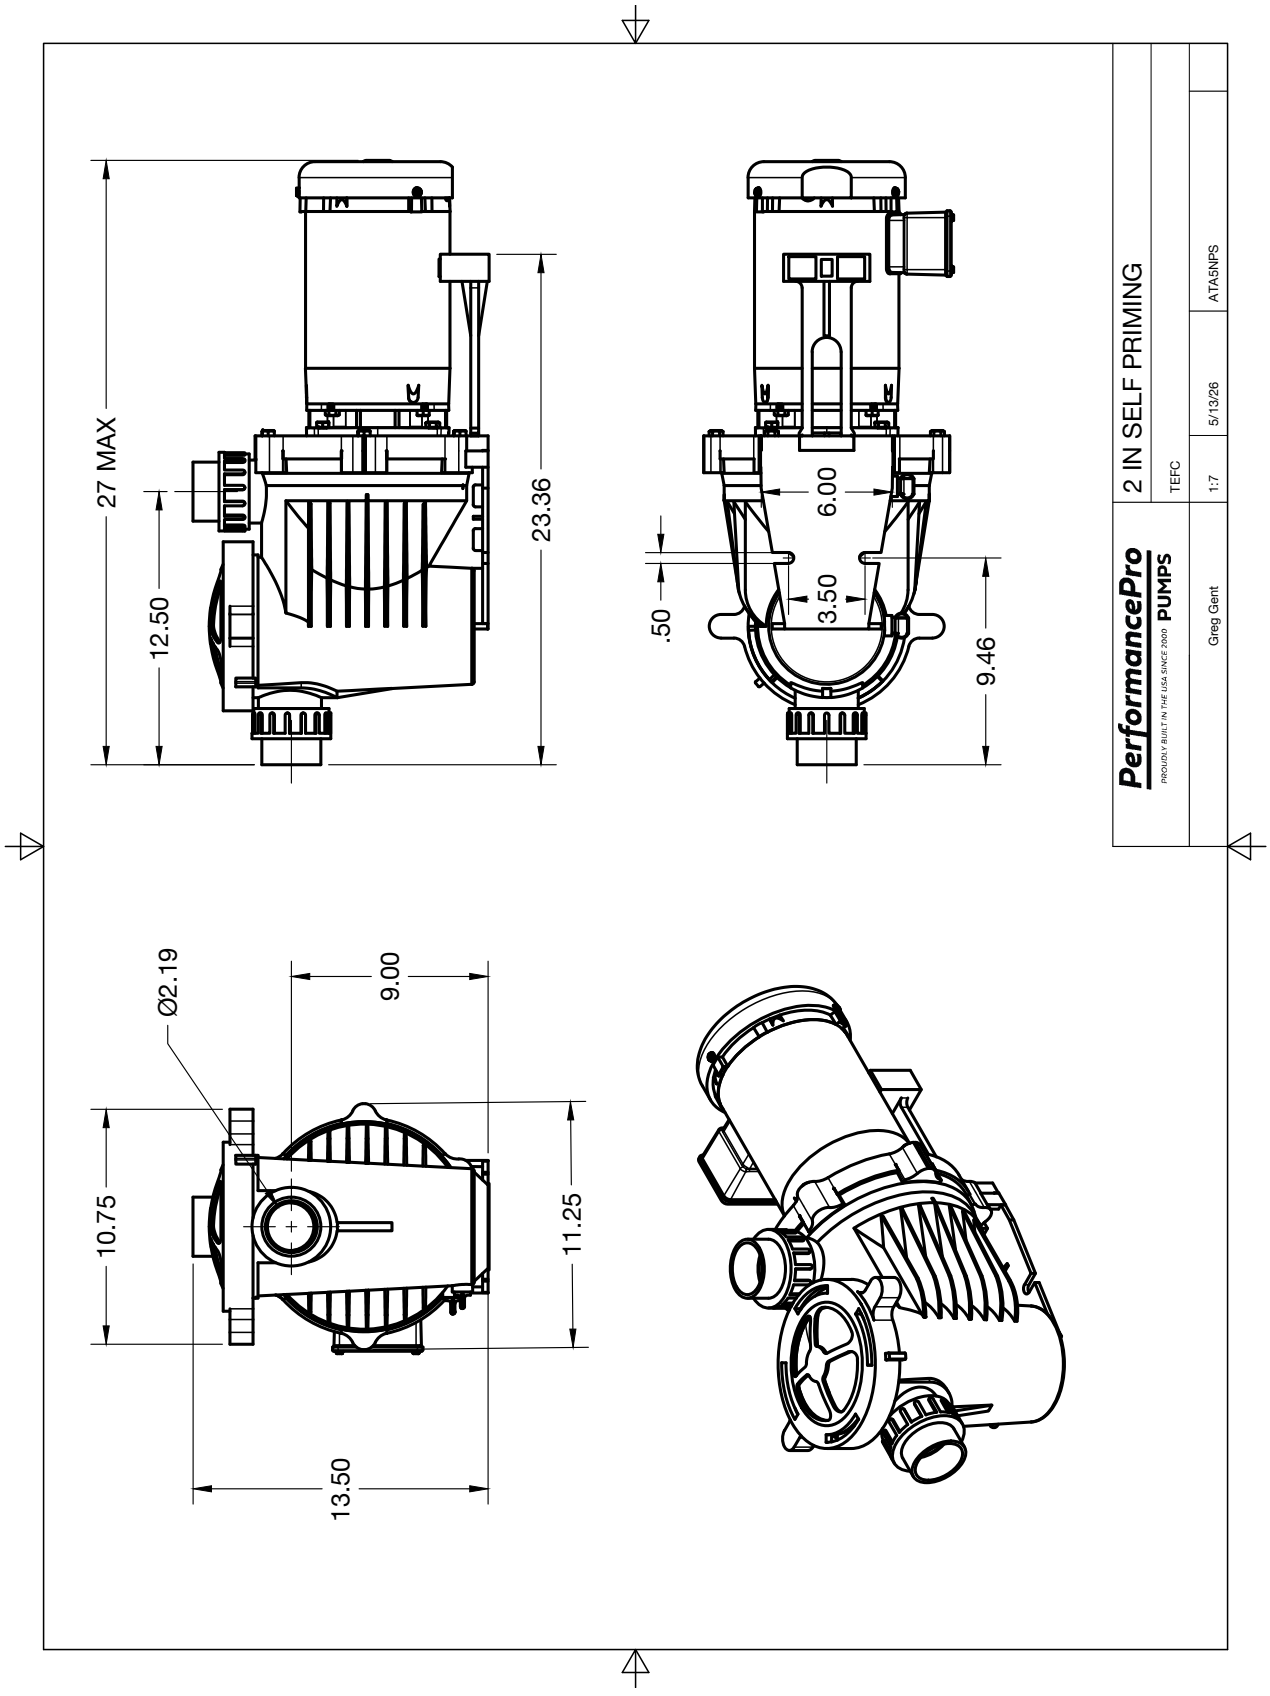
TEST NO. 1585

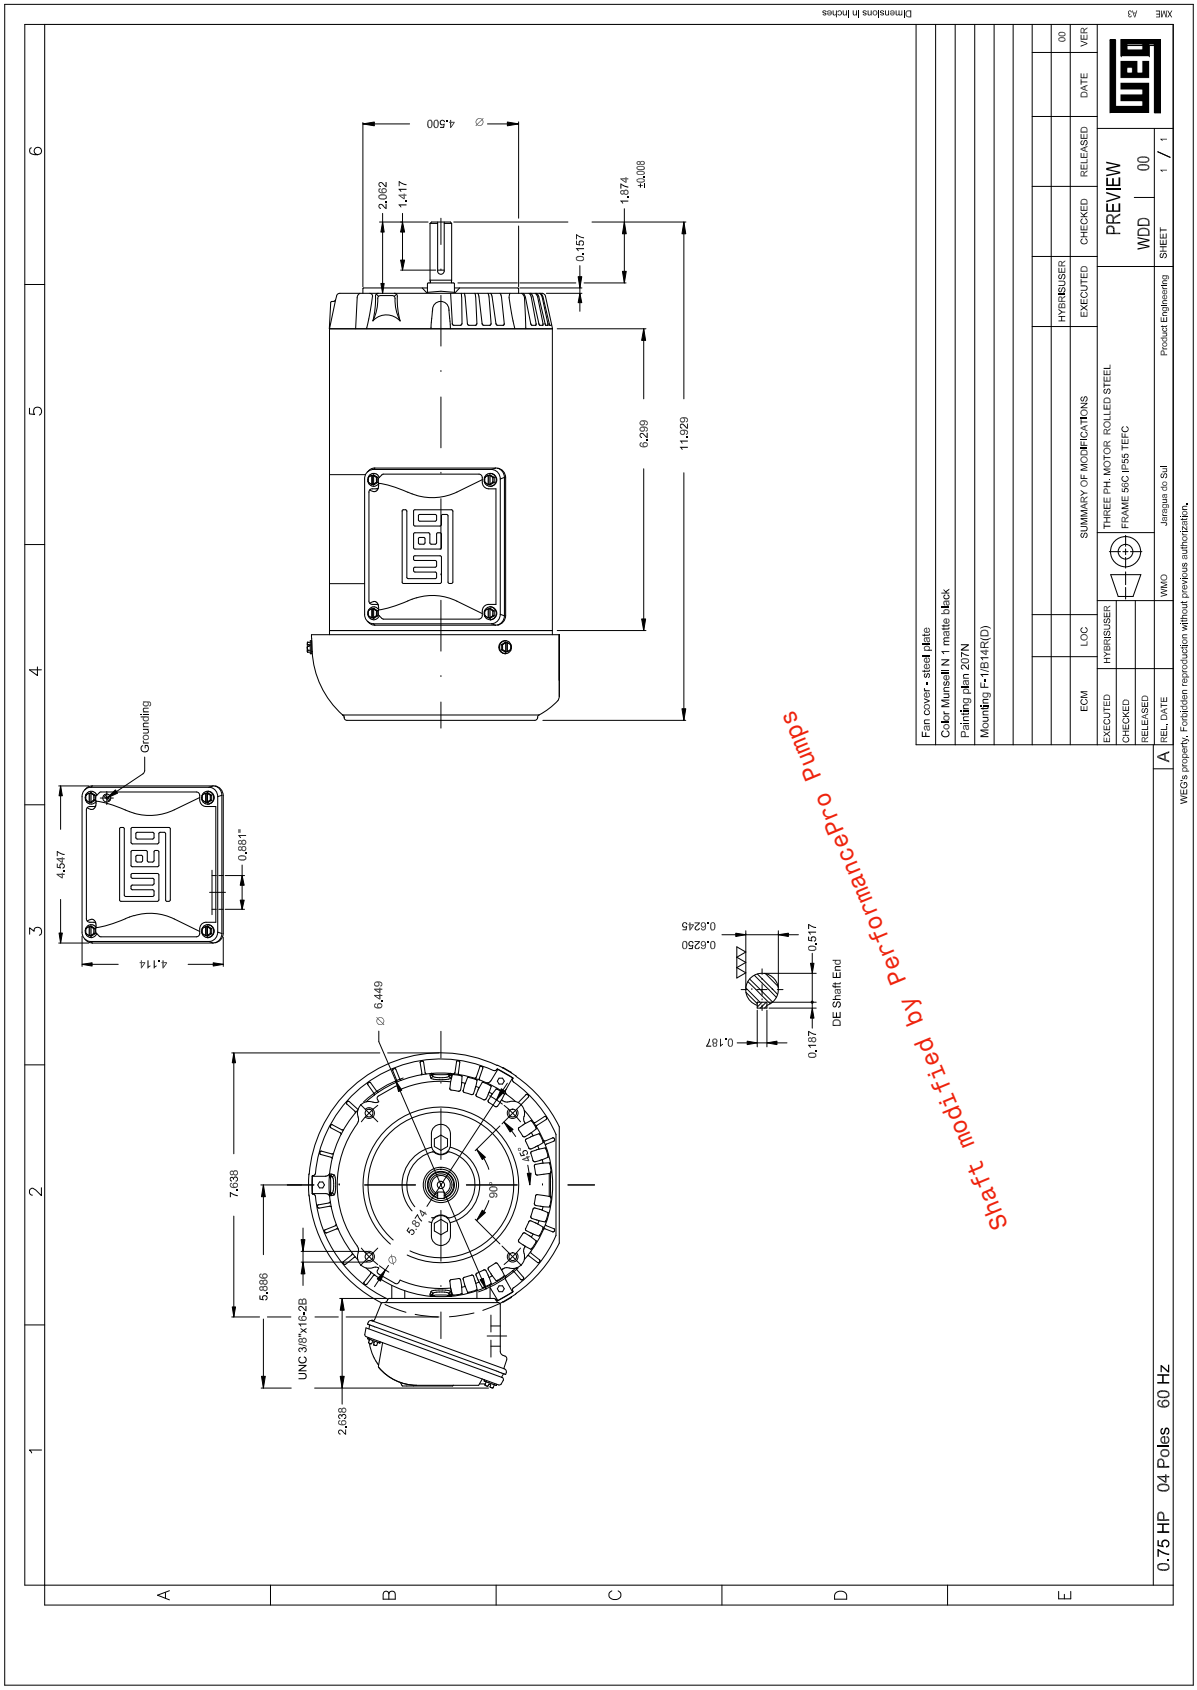
2 IN SELF PRIMING

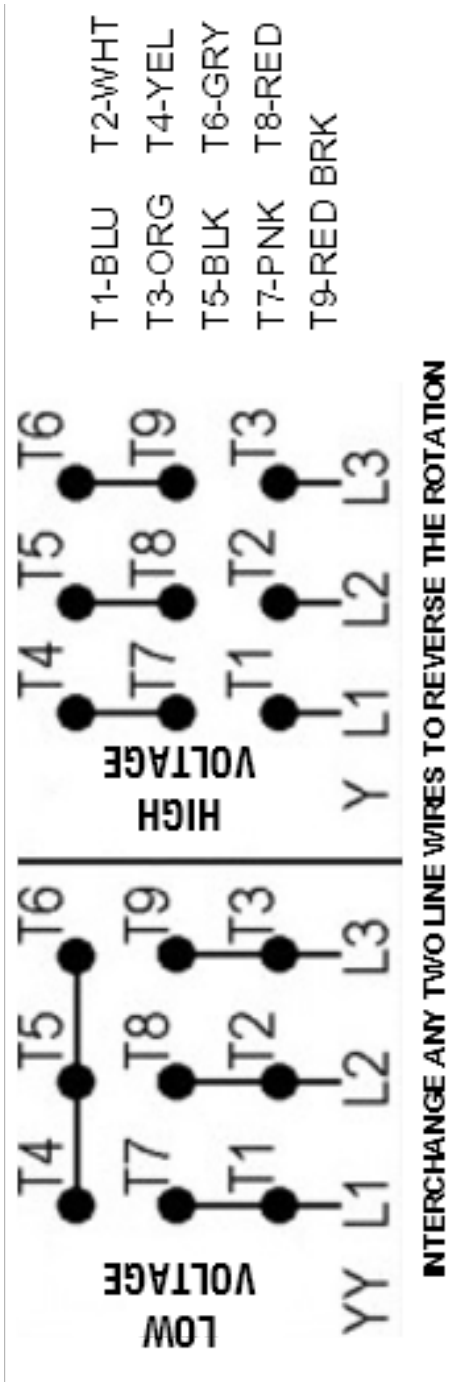
PUMP DATA	
MAX FLOW	145
MAX HEAD	21.8
MAX POWER	643
IMPELLER	AP3/4L
TRIM	4.9

MOTOR DATA	
MOTOR NUMBER	CPM-447
HP	0.75
ENCLOSURE	TEFC
RPM	1755
VOLTAGE	230/460
CURRENT	2.44/1.22
PHASE	3
FREQUENCY	60
FRAME	56J (Shaft Mod)




27 MAX
12.50
23.36
6.00
3.50
.50
9.46
Ø2.19
9.00
10.75
11.25
13.50
2 IN SELF PRIMING
TEFC
1:7
5/13/26
ATA5NPS
PerformancePro
PROUDLY BUILT IN THE USA SINCE 2000 PUMPS
Greg Gent


Dimensions in inches
XME A3
Fan cover - steel plate
Color Munsell N 1 matte black
Painting plan 207N
Mounting F-1/B14R(D)
SUMMARY OF MODIFICATIONS
ECM
LOC
EXECUTED
CHECKED
RELEASED
REL. DATE
HYBRIDUSER
VMO
Jaraguá do Sul
Product Engineering
THREE PH. MOTOR ROLLED STEEL
FRAME 56C IP55 TEFC
PREVIEW
WDD 00
SHEET 1 / 1
DATE
VER
00
0.75 HP 04 Poles 60 Hz
WEG's property. Forbidden reproduction without previous authorization.
Grounding
4.547
0.881"
4.114
4.500 Ø
2.062
1.417
1.874 ±0.008
0.157
6.299
11.929
0.6245
0.6250
0.517
0.187
0.187
DE Shaft End
Ø 6.449
7.638
5.886
UNC 3/8"x16-2B
2.638
5.874
45°
90°
Shaft modified by Performancepro Pumps


T1-BLU T2-WHT
T3-ORG T4-YEL
T5-BLK T6-GRY
T7-PNK T8-RED
T9-RED BRK
HIGH VOLTAGE
T4 T5 T6
T7 T8 T9
T1 T2 T3
Y L1 L2 L3
LOW VOLTAGE
T4 T5 T6
T7 T8 T9
T1 T2 T3
YY L1 L2 L3
INTERCHANGE ANY TWO LINE WIRES TO REVERSE THE ROTATION