MODEL

P34-4800-7S-T2G6G-V

TEST NO. 1633

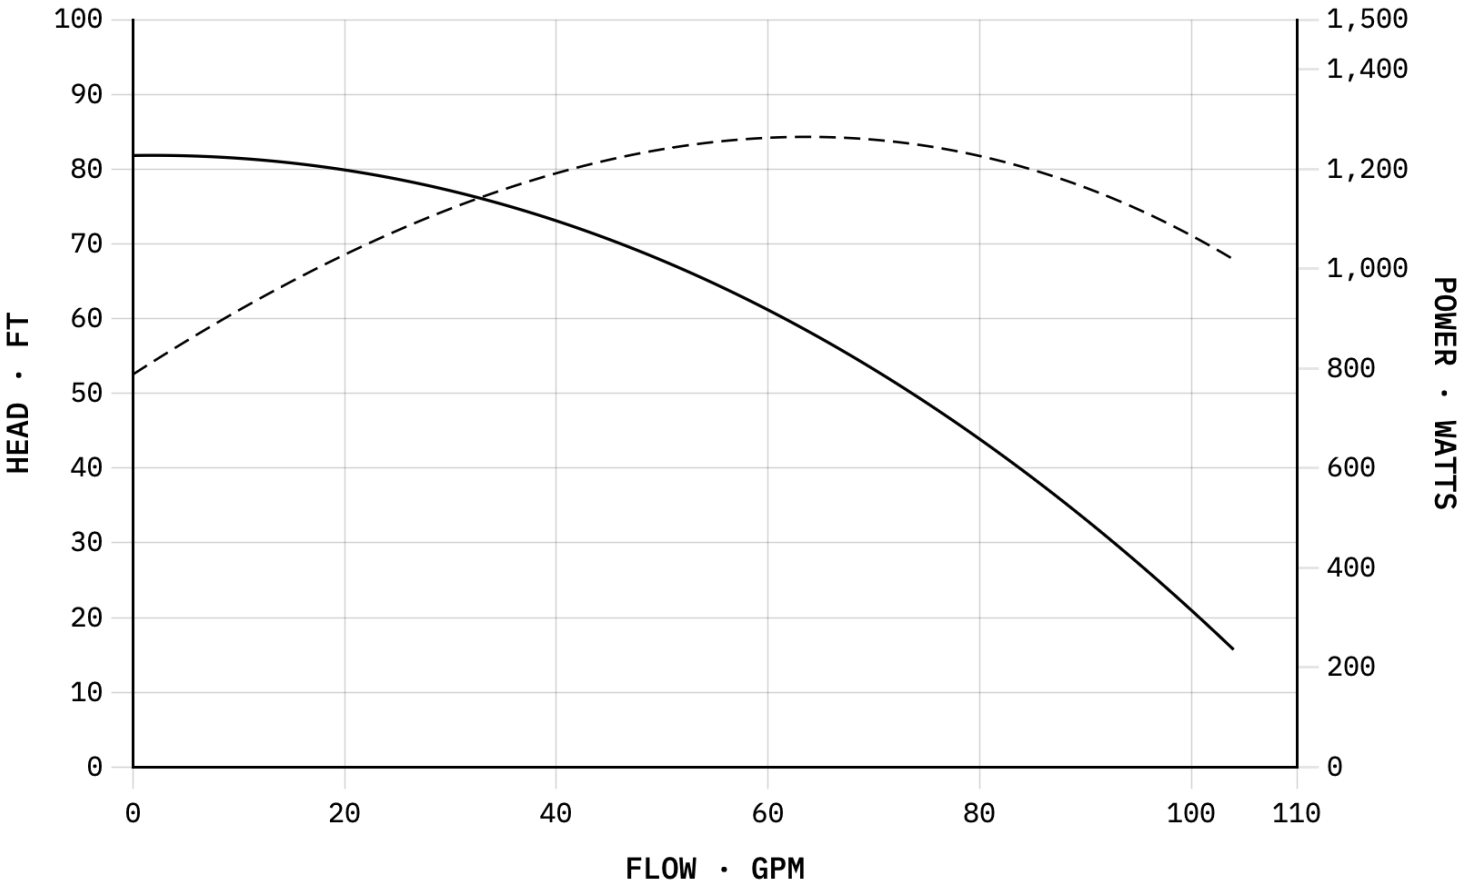
1.5NPT FLOODED SUCTION

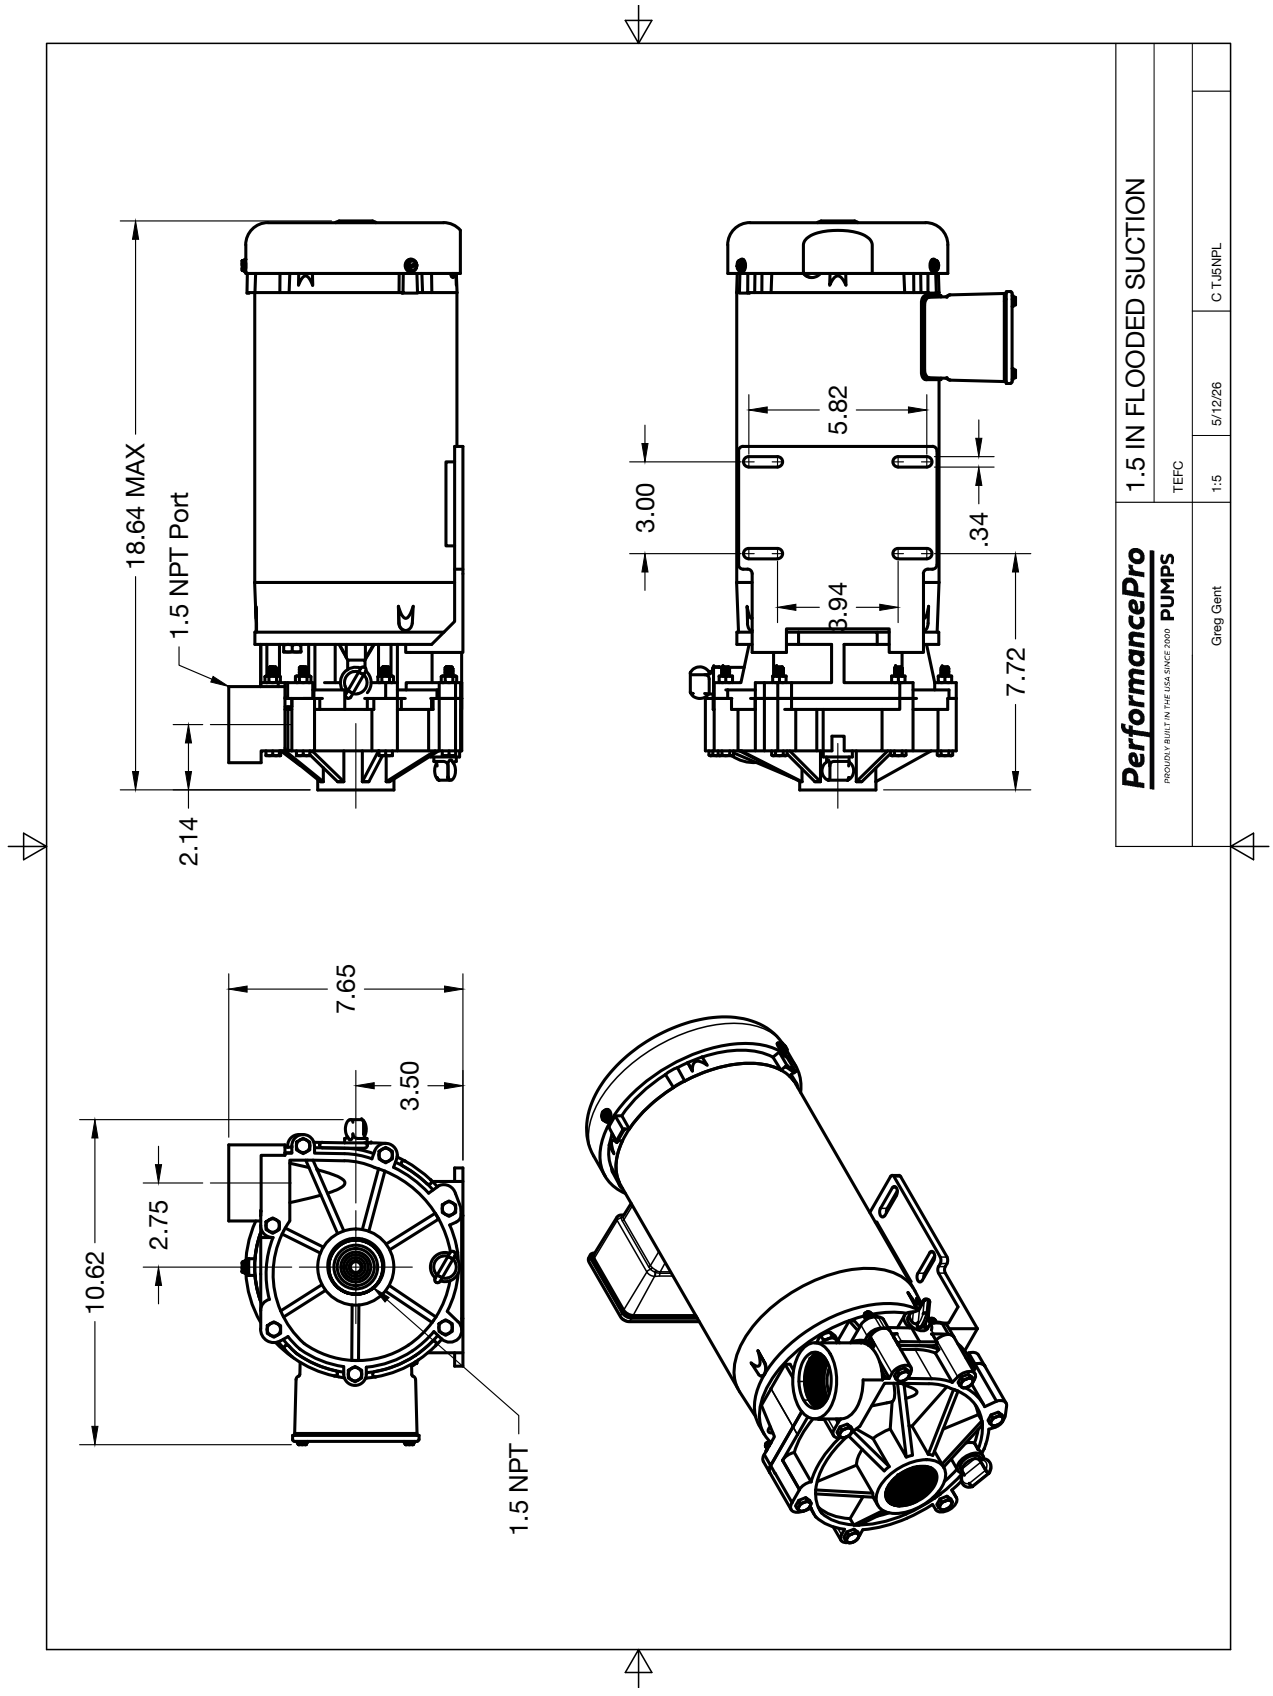
PUMP DATA

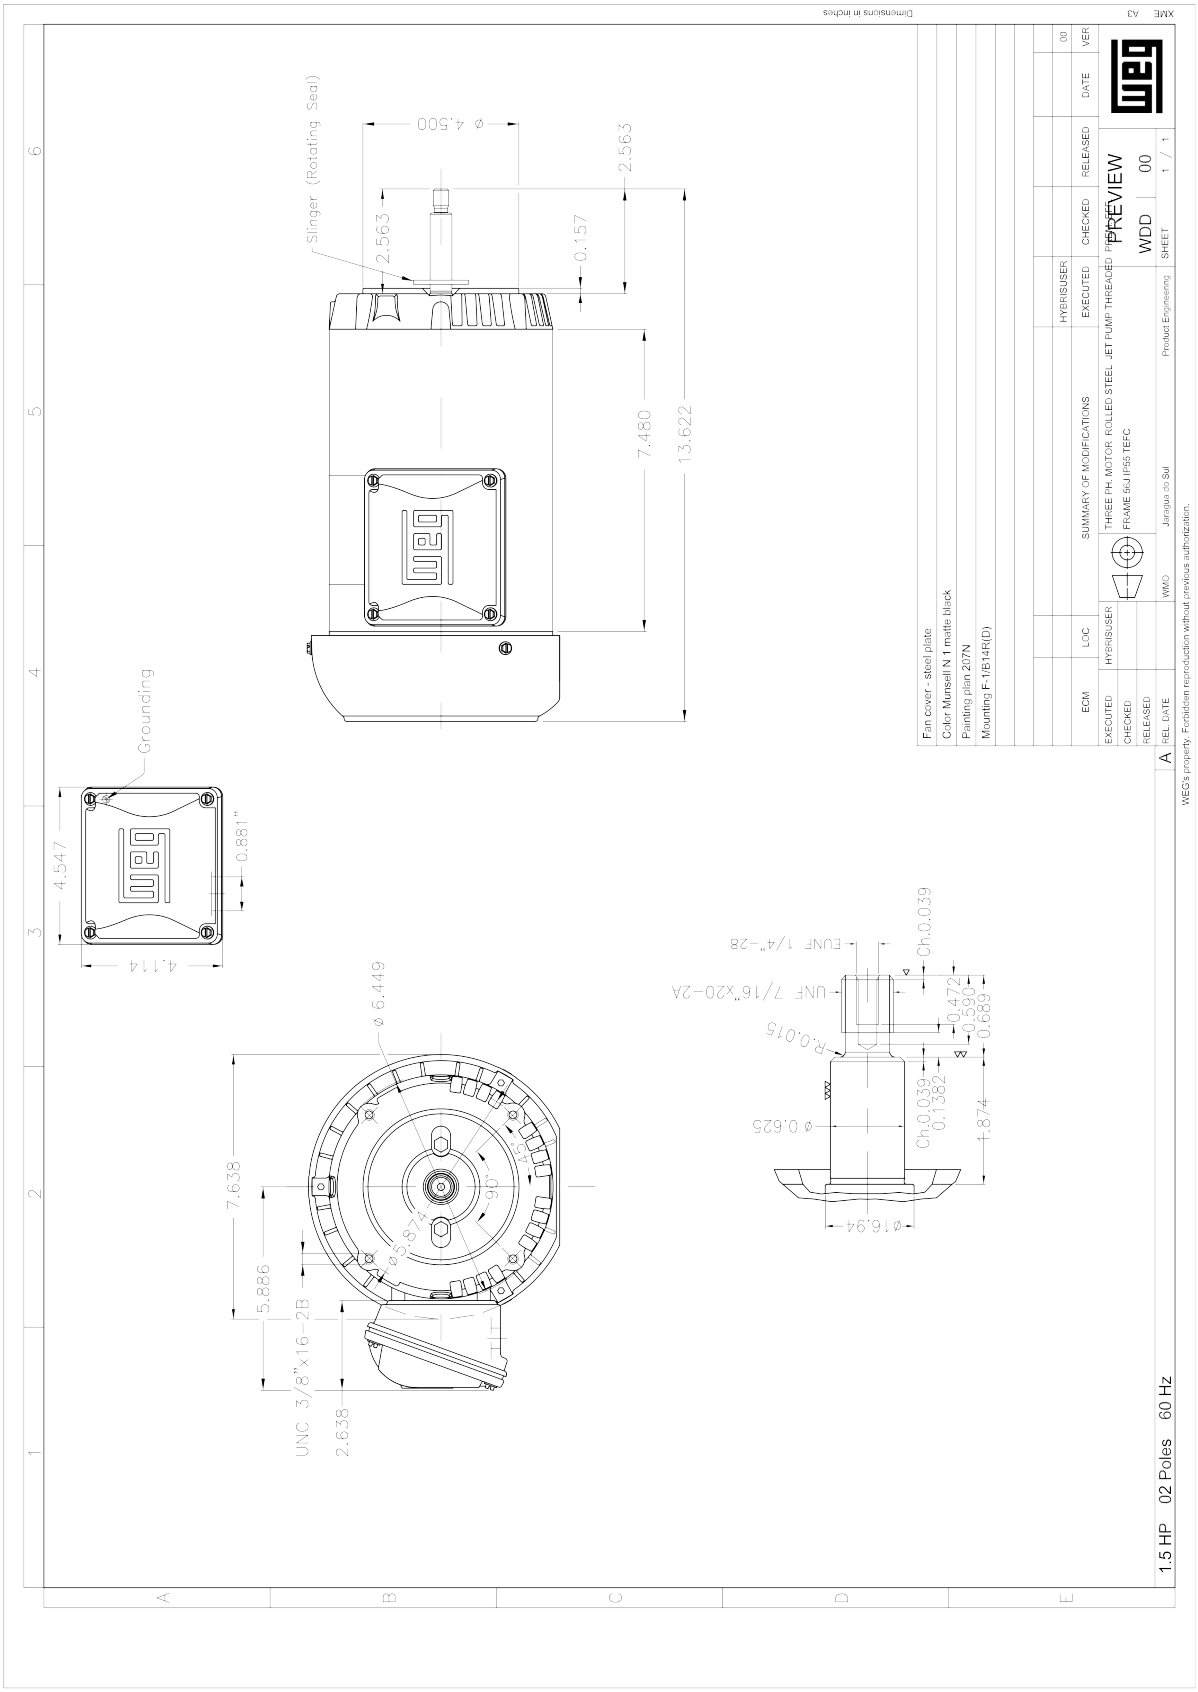
MAX FLOW	104
MAX HEAD	81.8
MAX POWER	1265
IMPELLER	CN1
TRIM	4.8

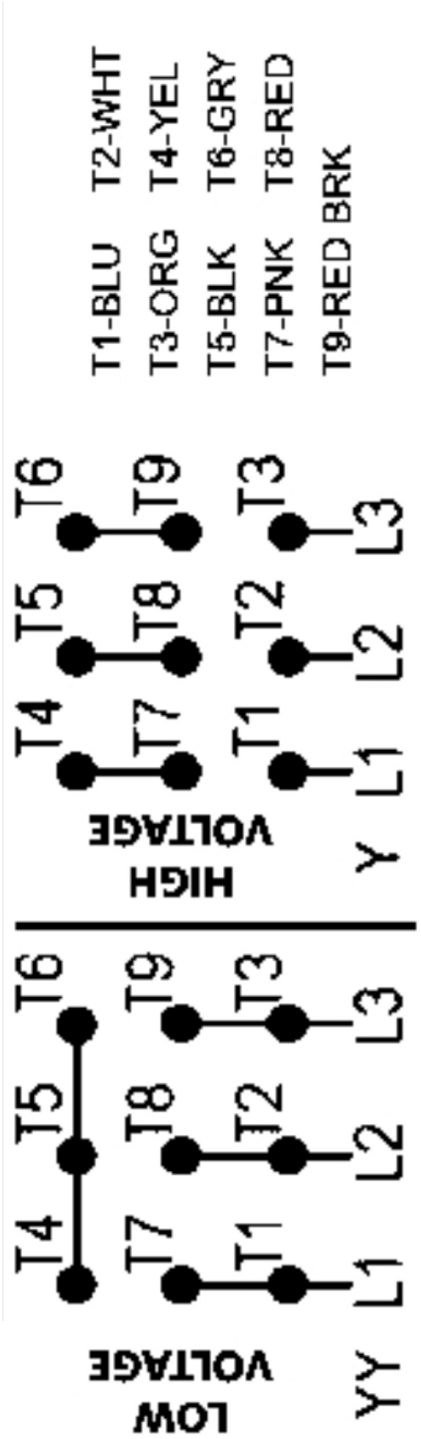
MOTOR DATA

MOTOR NUMBER	CPM-425
HP	1.50
ENCLOSURE	TEFC
RPM	3520
VOLTAGE	230/460
CURRENT	3.74/1.87
PHASE	3
FREQUENCY	60
FRAME	56J (Jet Pump)




18.64 MAX
1.5 NPT Port
2.14
5.82
3.00
.34
3.94
7.72
7.65
3.50
2.75
10.62
1.5 NPT
1.5 IN FLOODED SUCTION
TEFC
1:5
5/12/26
C TJ5NPL
PerformancePro
PROUDLY BUILT IN THE USA SINCE 2000 PUMPS
Greg Gent


Dimensions in inches
Slinger (Rotating Seal)
ø 4.500
2.563
2.563
0.157
7.480
13.622
Grounding
4.547
0.881"
4.114
ø 6.449
7.638
5.886
UNC 3/8"x16-2B
2.638
ø 0.587 x 90°
UNF 7/16"x20-2A
R.0.075
0.472
0.598
0.689
Ch.0.039
0.1382
ø 0.625
1.874
ø16.94
Fan cover - steel plate
Color Munsell N 1 matte black
Painting plan 207N
Mounting F-1/B14R(D)
SUMMARY OF MODIFICATIONS
THREE PH. MOTOR ROLLED STEEL JET PUMP THREADED
FRAME 56J IP55 TEFC
PREVIEW
WDD 00
1.5 HP 02 Poles 60 Hz
WEG's property. Forbidden reproduction without previous authorization.


T1-BLU
T3-ORG
T5-BLK
T7-PNK
T9-RED BRK
T2-WHT
T4-YEL
T6-GRY
T8-RED
HIGH VOLTAGE
Y
T4 T7 T1 L1
T5 T8 T2 L2
T6 T9 T3 L3
LOW VOLTAGE
YY
T4 T7 T1 L1
T5 T8 T2 L2
T6 T9 T3 L3