

PerformancePro
PROUDLY BUILT IN THE USA SINCE 2000 PUMPS


PerformancePro Pumps Engineering Data Packet


Pump:	
Series:	AP Low Speed
Pump Model:	AP-1/2-92
Design:	Self Priming
Inlet:	3 inch
outlet:	3 inch
Impeller:	AP1/2L
Trim:	5.12
Fluid:	Water


Motor:	
Motor Number:	APM-346
Manufacturer:	Baldor
Rated HP:	0.50
Total HP:	0.68
Speed:	1725
Enclosure:	TEFC
Frame:	56Y (Square flange)
Volts:	115/230
Phase:	1
Frequency:	60
Amps At Total HP:	6.4/3.2

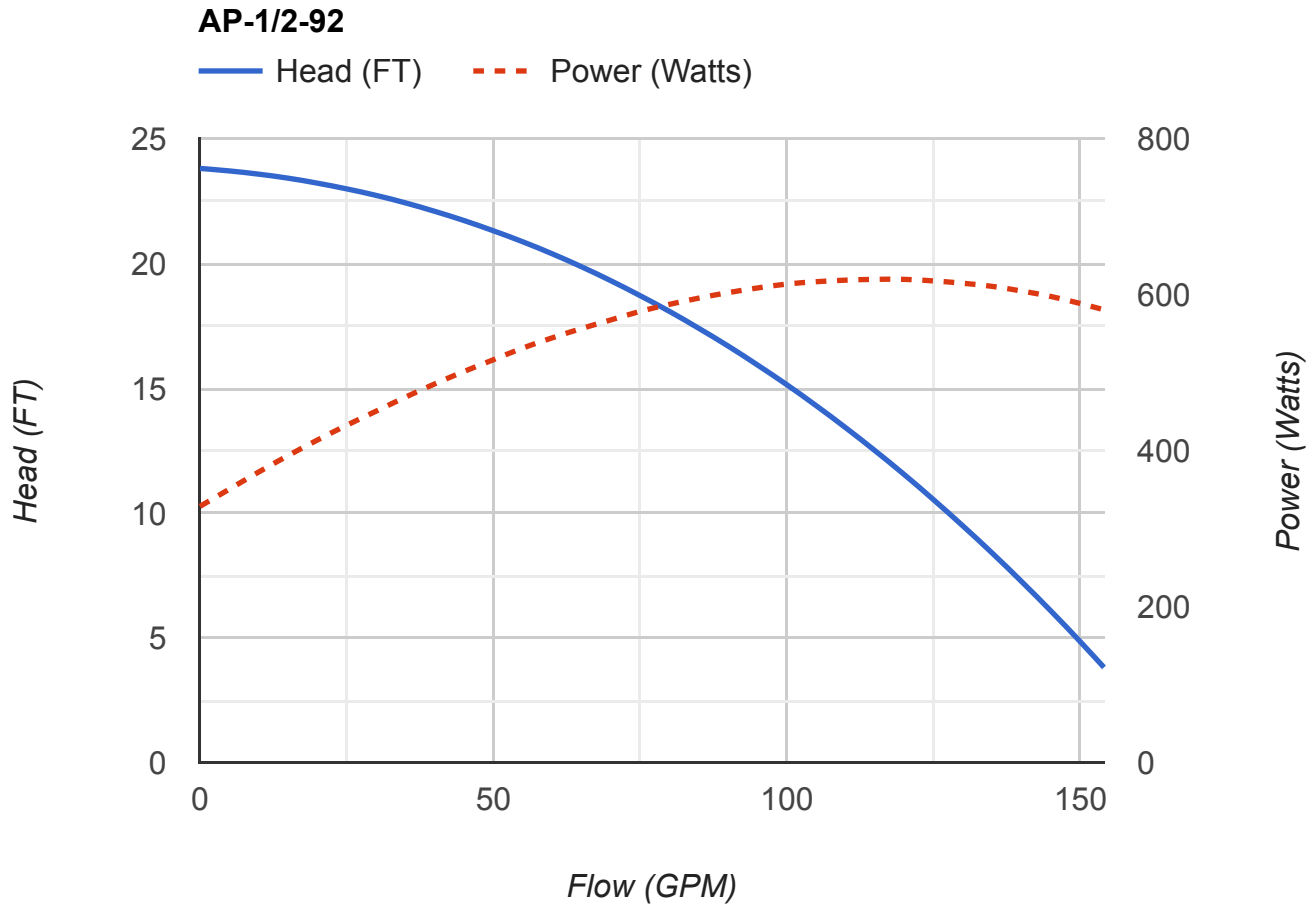

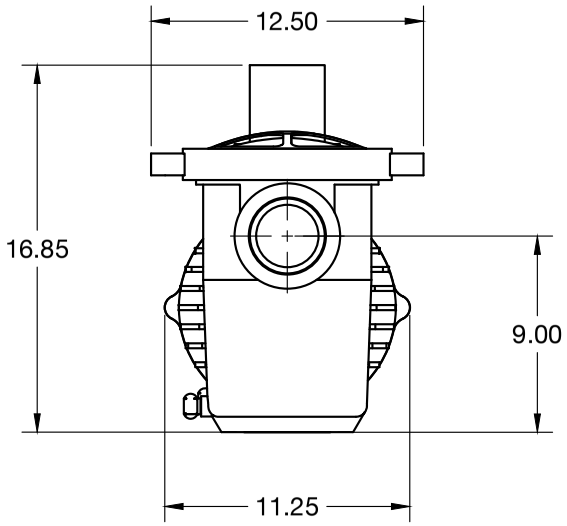

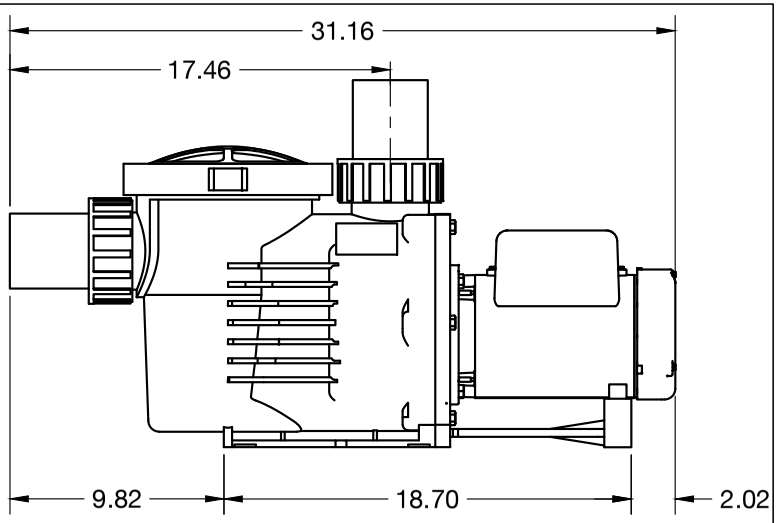


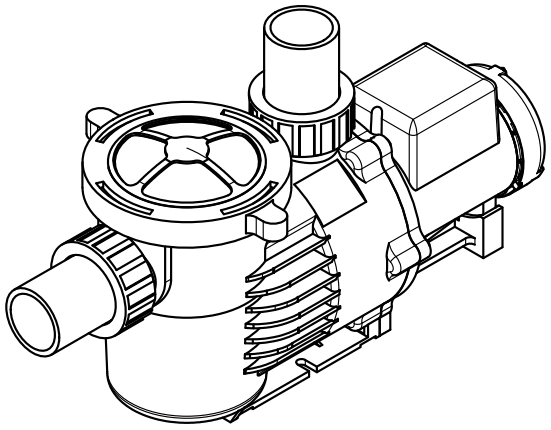

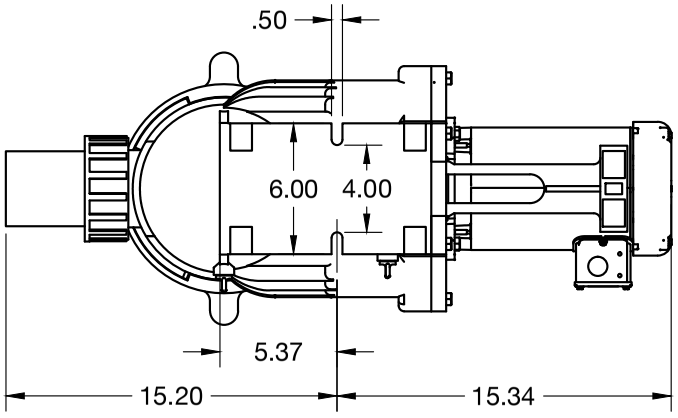

PerformancePro PROUDLY BUILT IN THE USA SINCE 2000 PUMPS	Artesian Pro Low Speed			
	THP: 0.675HP			
Greg Gent	1:7	3/22/21	A3T001185	00

34LYM106

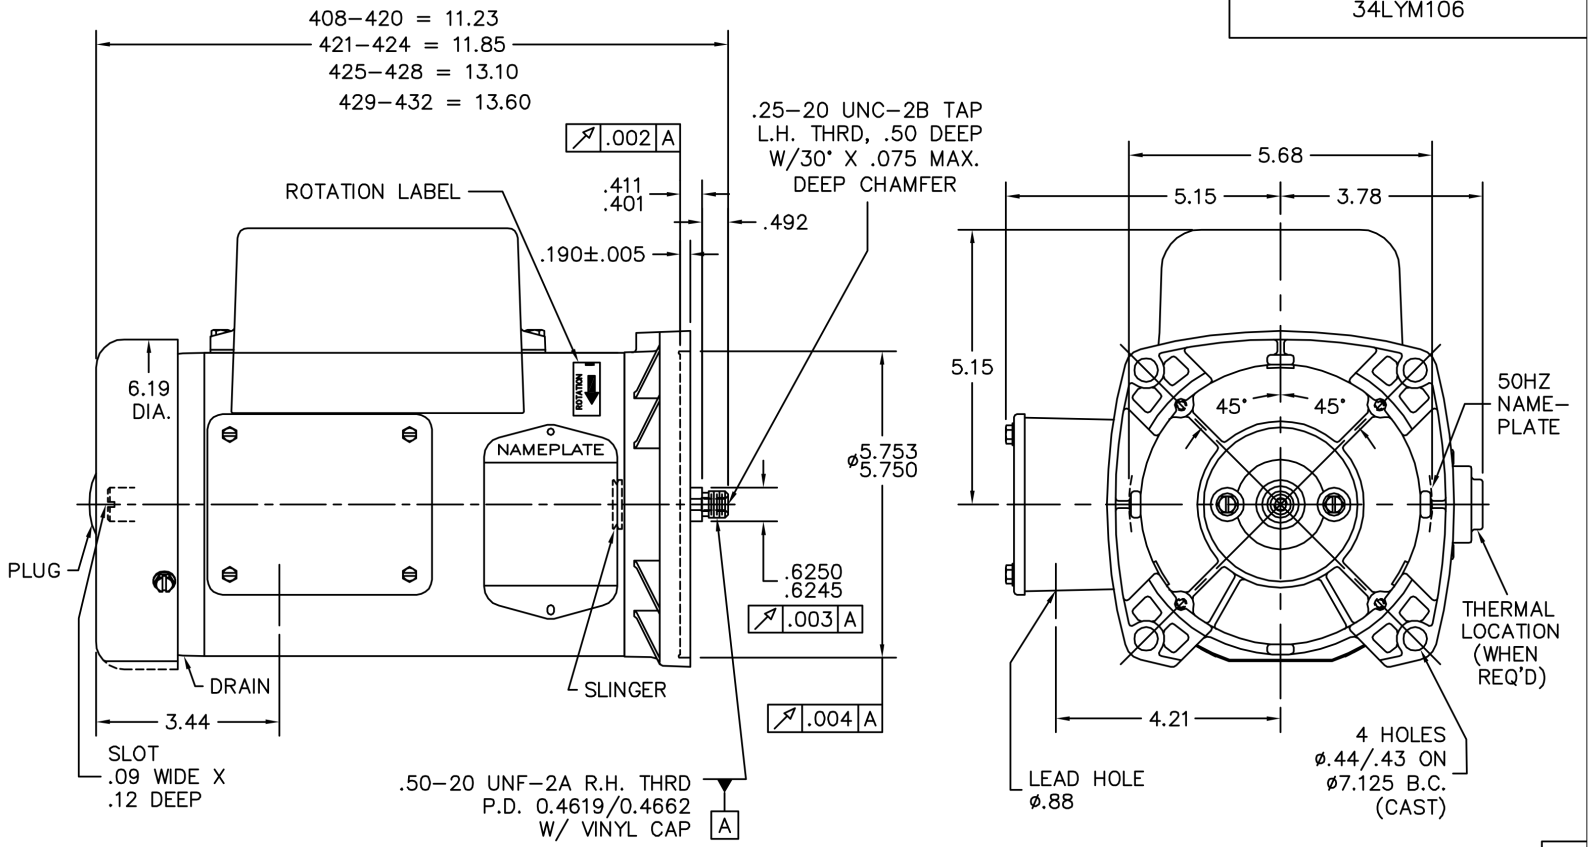

NOTE:
CUT THREADS ONLY,
NO ROLLED THREADS
(CUSTOMER REQIREMENT)

34LYM106

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.


REV. DESC: RPL 34EP3501A03 W/34EP3501A16		
REV. LTR: A	VERSION: 01	TDR: 000000926897
FILE: \AAA\00195\638	REVISED: 08:36:37 05/27/2015	BY: ENERINO
MTL: –		

BALDOR

VER 34LC TEFC 56YZ LG KOBX, POOL PUMP MTR, CUT THDS, WAVY

SH 1 of 1

CD0308

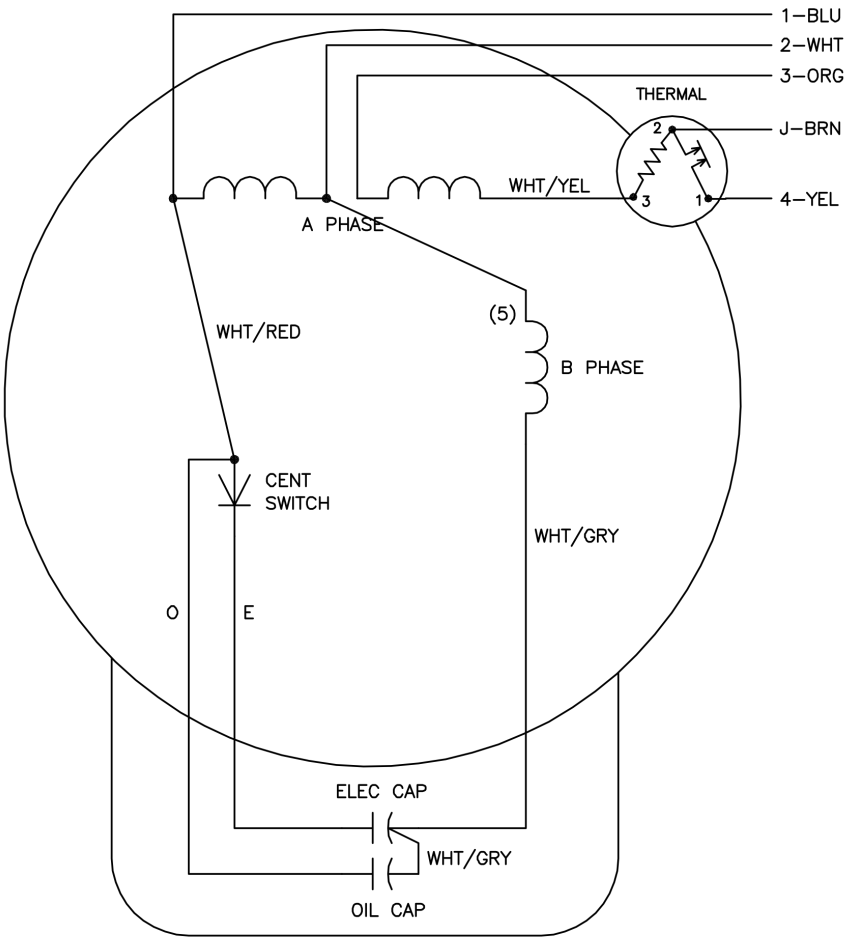

	LINE A	LINE B	JOIN	JOIN
HIGH	1	4	2,3	J
LOW	1,3	4	–	2,J

NOTES:

1. CONNECTIONS ARE SHOWN FOR CCW ROTATION FACING END OPPOSITE SHAFT EXTENSION (STD). FOR CW ROTATION, INTERCHANGE 5 AND 8 INTERNALLY.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: ADDED CM PLANT CODE ONLY			
REV. LTR: E	BY: TWD	REVISED: 09:39:48 10/24/2001	TDR: 253023
CD0308		FILE: AAA00007481	REF: CD0308
		MTL: –	

BALDOR ELECTRIC Co.

TYPE LC, DV, FIX, THERMAL, B PH AMPS THRU HTR, 5 LEADS

CD0308