PerformancePro
PROUDLY BUILT IN THE USA SINCE 2000 PUMPS


PerformancePro Pumps Engineering Data Packet


Pump:


Series:	Cascade Low Speed
Pump Model:	C1/4-49
Design:	Flooded Suction
Inlet:	1.5 inch
outlet:	1.5 inch
Impeller:	CN3
Trim:	4.79
Fluid:	Water


Motor:


Motor Number:	CPM-344
Manufacturer:	Baldor
Rated HP:	0.25
Total HP:	0.34
Speed:	1725
Enclosure:	TEFC
Frame:	56J (Jet Pump)
Volts:	115/230
Phase:	1
Frequency:	60
Amps At Total HP:	3.5/1.75

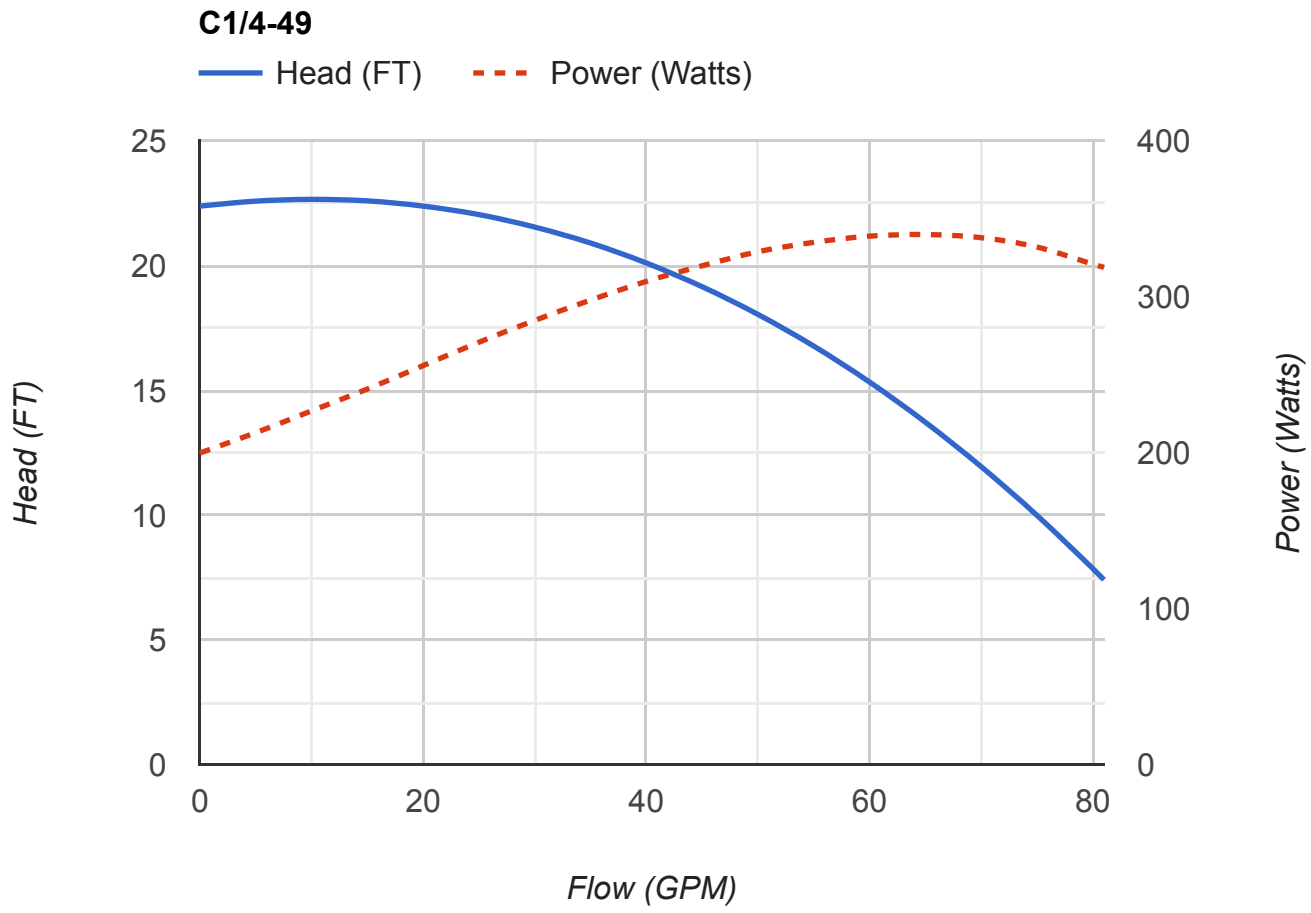

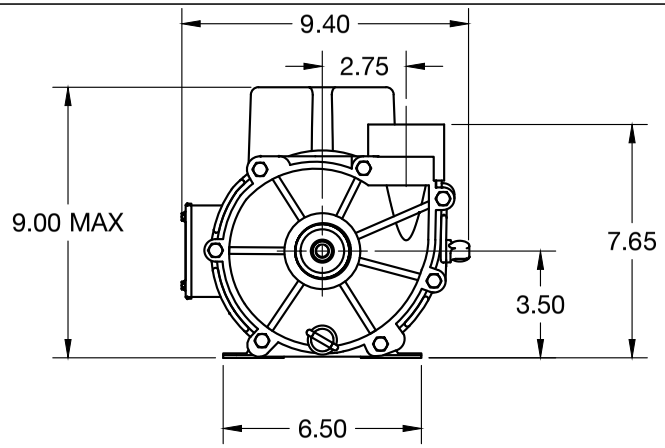

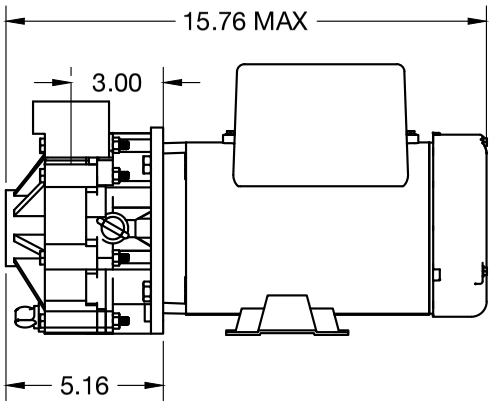


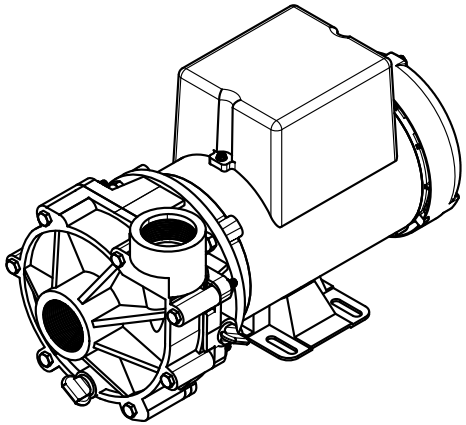

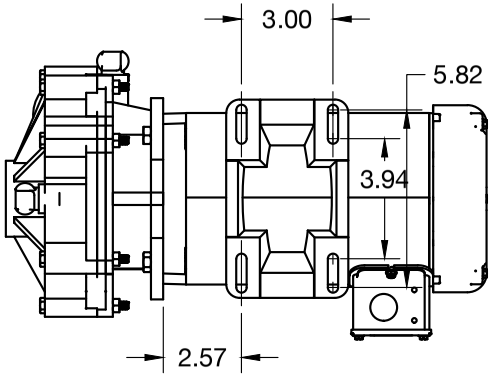

PerformancePro PROUDLY BUILT IN THE USA SINCE 2000 PUMPS	Cascade Low Speed			
	THP: 0.17HP THRU 0.34HP			
Greg Gent	1:5	3/26/21	C1T001316	01

34LYM108

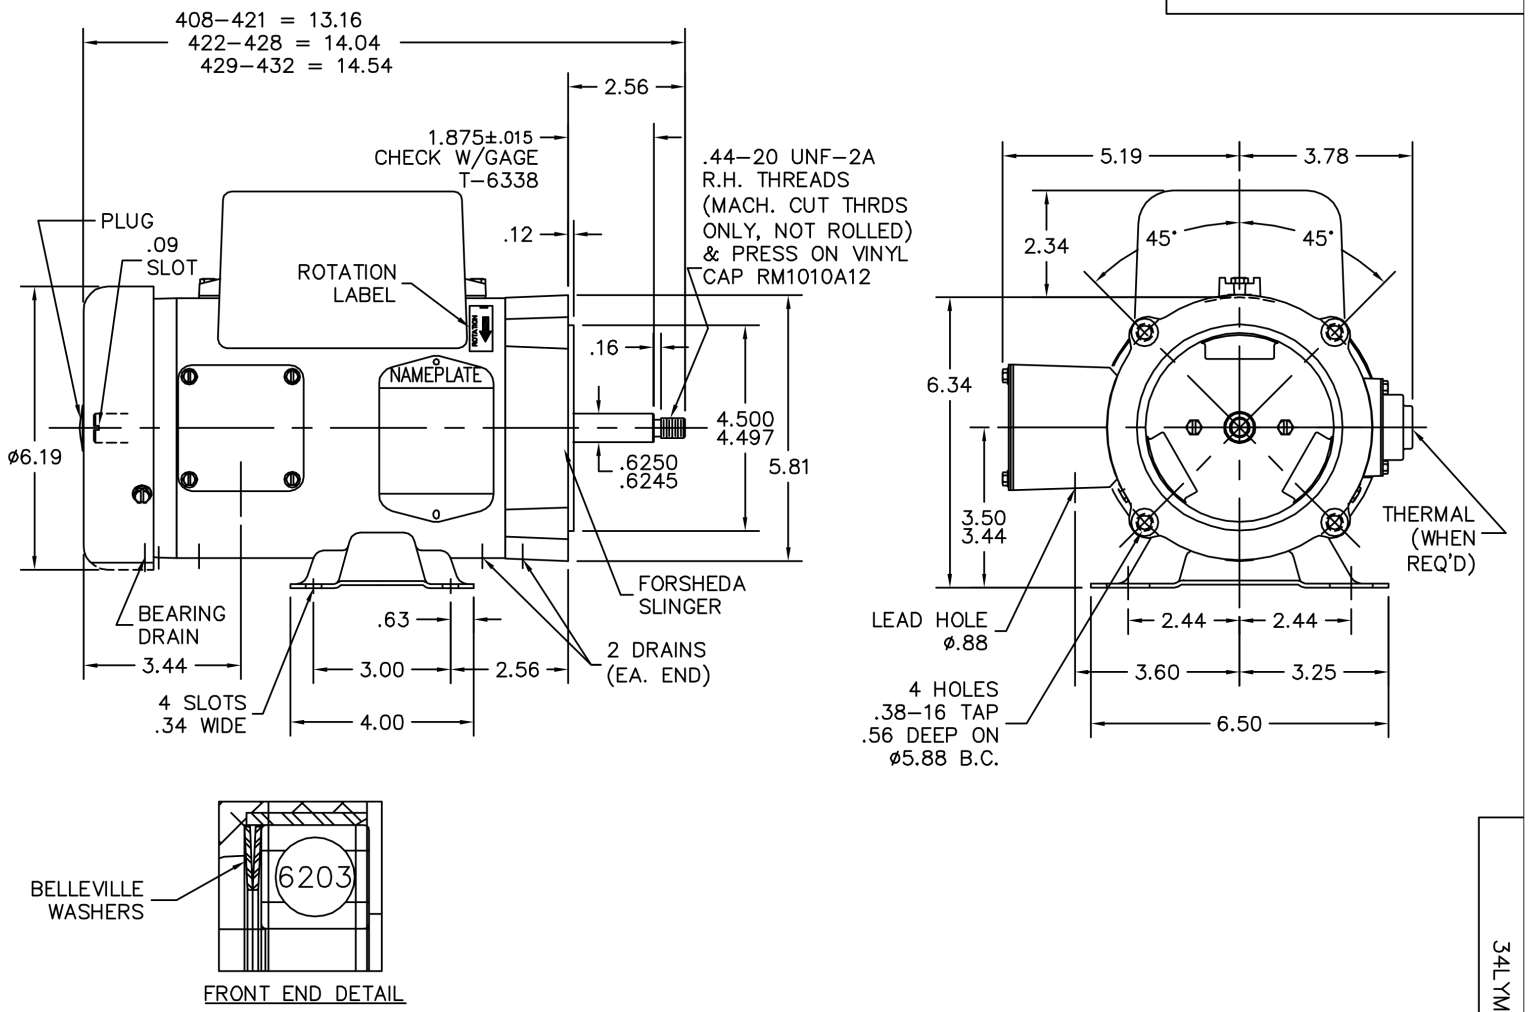

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: ADD FRONT END DETAIL		
REV. LTR: B	VERSION: 02	TDR: 000000894323
FILE: \AAA\00195\678	REVISED: 11:16:40 02/26/2015	BY: ENGREH0
MTL: –		


BALDOR

HOR 34LC 56J TEFC W/SPL DRAINS, MACH CUT THRDS, BELLEVILLES

SH 1 of 1

34LYM108

CD0308

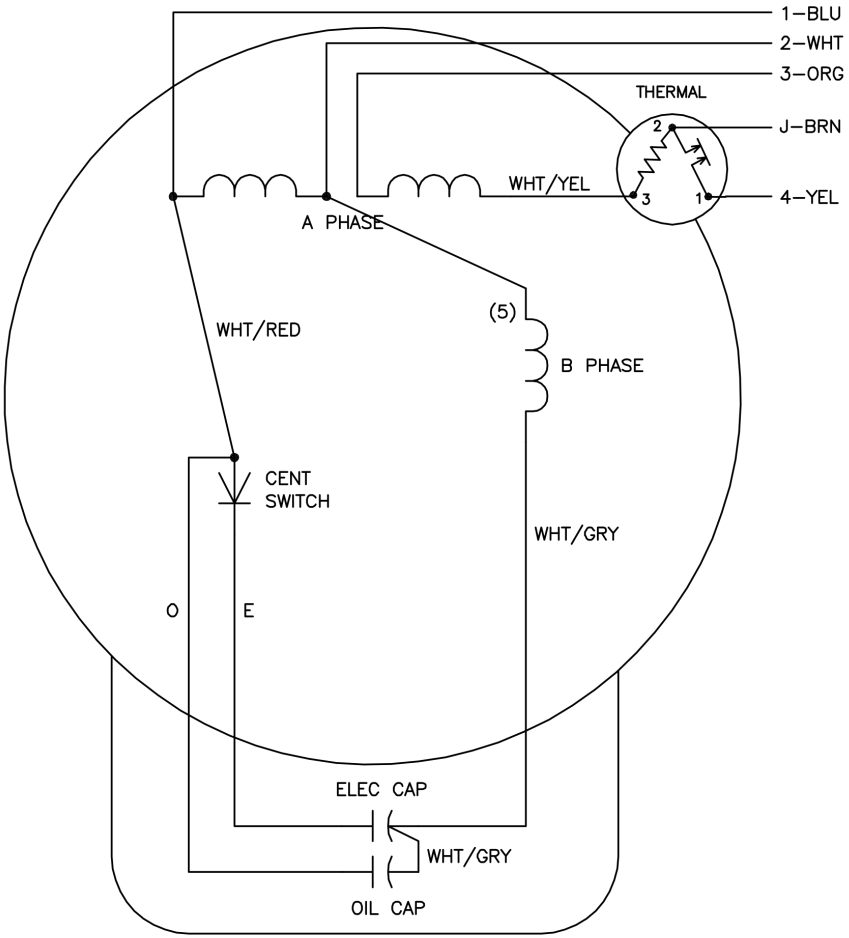

	LINE A	LINE B	JOIN	JOIN
HIGH	1	4	2,3	J
LOW	1,3	4	–	2,J

NOTES:

1. CONNECTIONS ARE SHOWN FOR CCW ROTATION FACING END OPPOSITE SHAFT EXTENSION (STD). FOR CW ROTATION, INTERCHANGE 5 AND 8 INTERNALLY.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: ADDED CM PLANT CODE ONLY			
REV. LTR: E	BY: TWD	REVISED: 09:39:48 10/24/2001	TDR: 253023
CD0308		FILE: AAA00007481	REF: CD0308
		MTL: –	

BALDOR ELECTRIC Co.

TYPE LC, DV, FIX, THERMAL, B PH AMPS THRU HTR, 5 LEADS

CD0308