MODEL


C1/3


TEST NO. 732

1.5NPT FLOODED SUCTION


PUMP DATA	
MAX FLOW	38
MAX HEAD	55.0
MAX POWER	600
IMPELLER	CN1/3
TRIM	4.8

MOTOR DATA	
MOTOR NUMBER	CPM-12
TOTAL HP	.6
ENCLOSURE	ODP
RPM	3450
VOLTAGE	115/208-230
CURRENT	5.2/2.8-2.6
PHASE	1
FREQUENCY	60
FRAME	56J (Jet Pump)

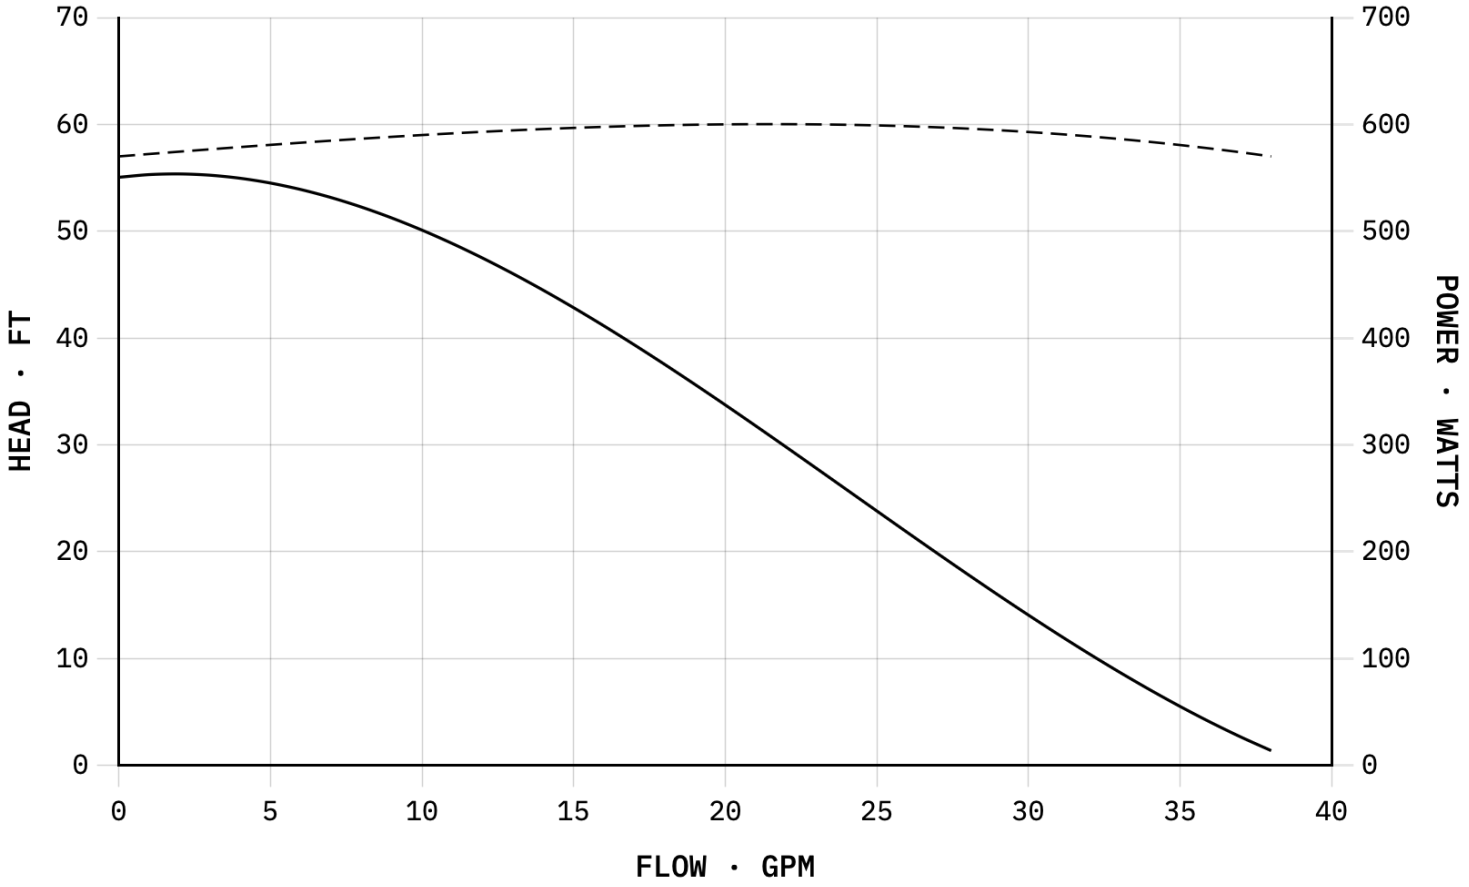


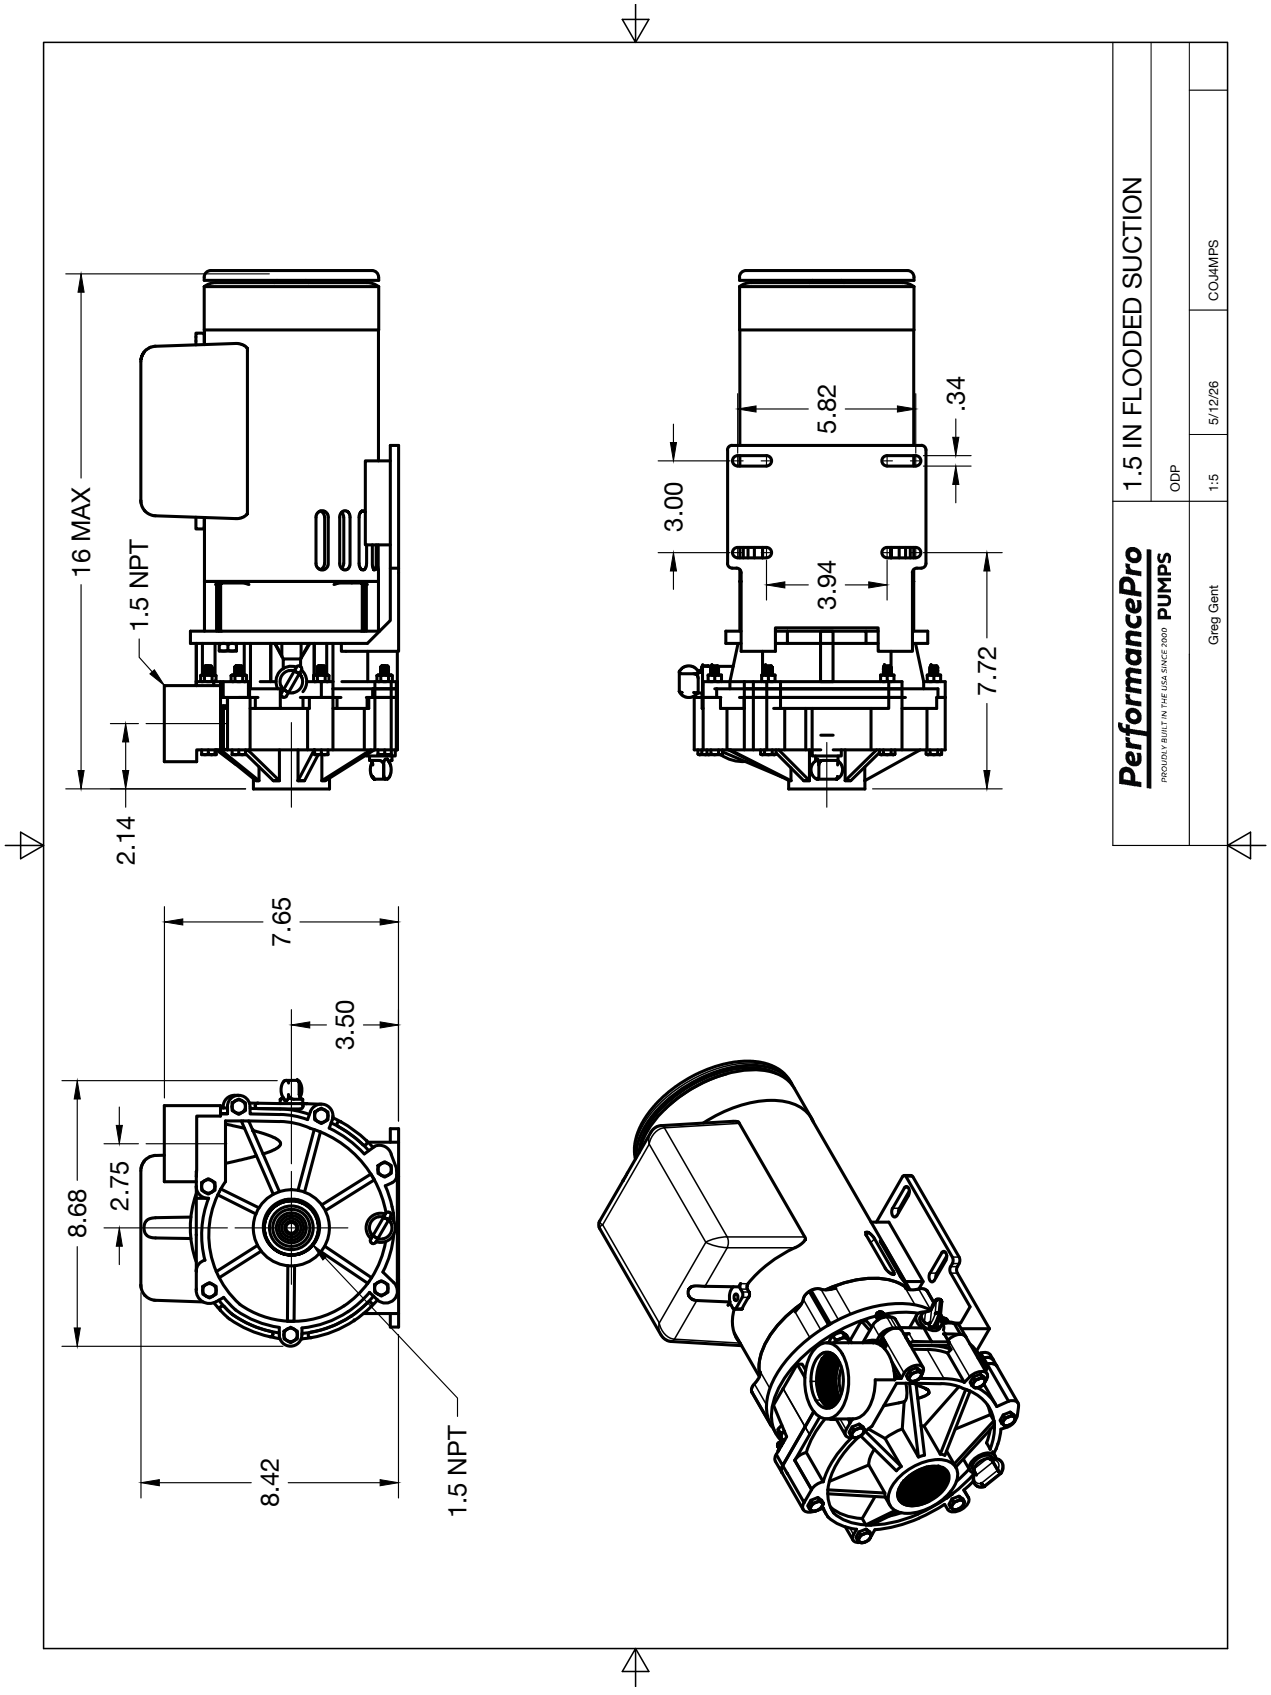
16 MAX
1.5 NPT
2.14
5.82
.34
3.00
3.94
7.72
7.65
3.50
8.68
2.75
8.42
1.5 NPT
1.5 IN FLOODED SUCTION
ODP
1:5
5/12/26
CQJ4MPS
PerformancePro
PROUDLY BUILT IN THE USA SINCE 2000 PUMPS
Greg Gent

BALDOR • RELIANCE Product Information Packet: 34F793R493G1 - .33HP,3450//2850RPM,1PH,60//50HZ,56C,341

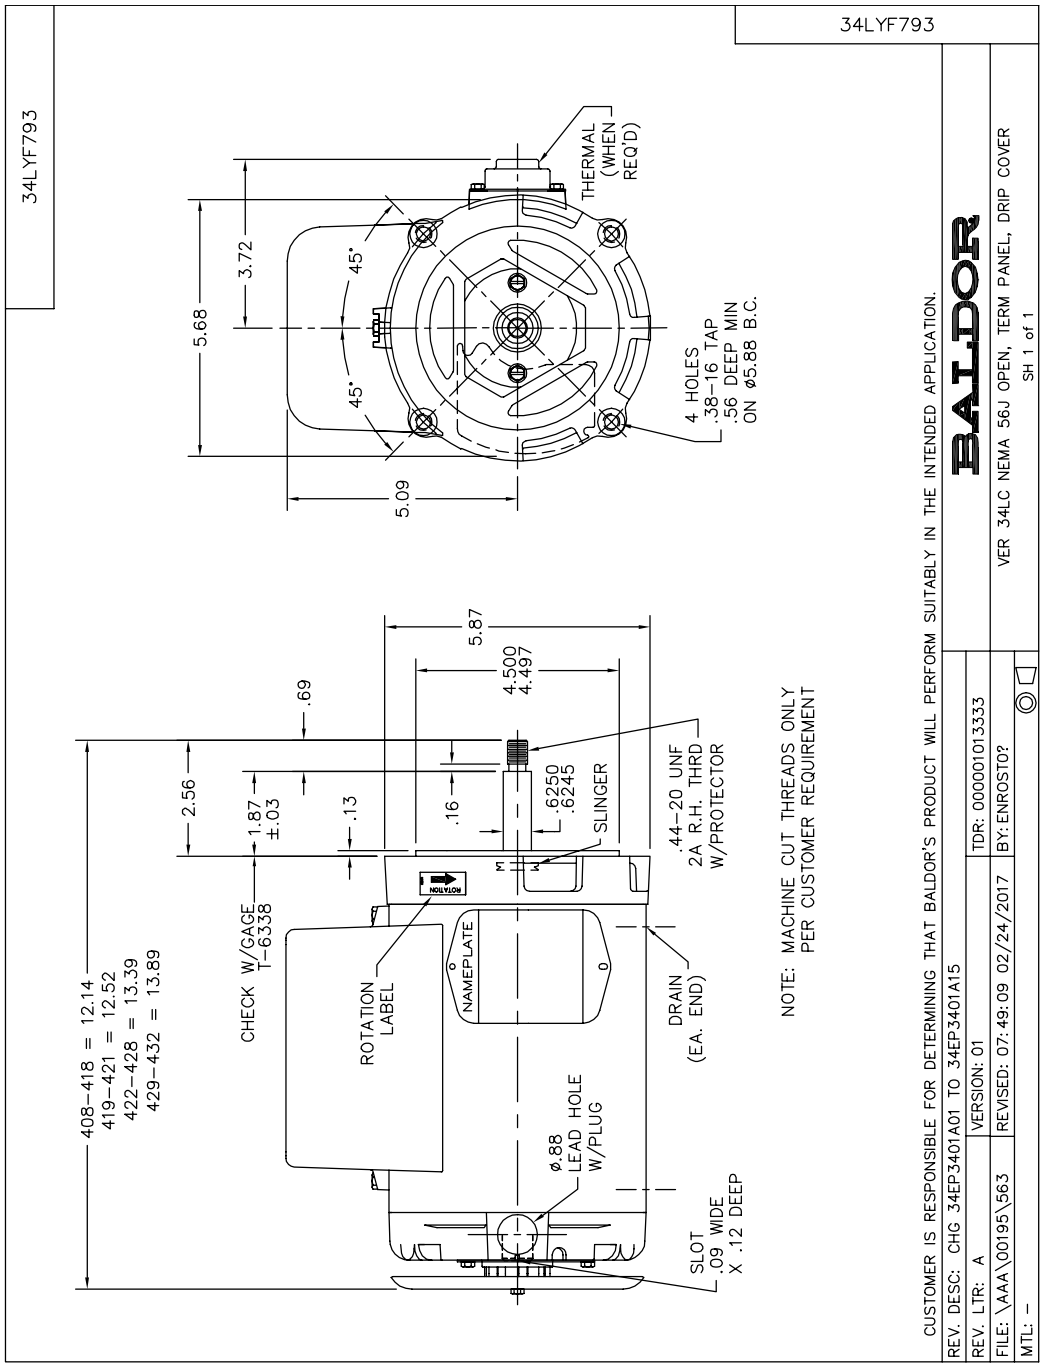

CD0308

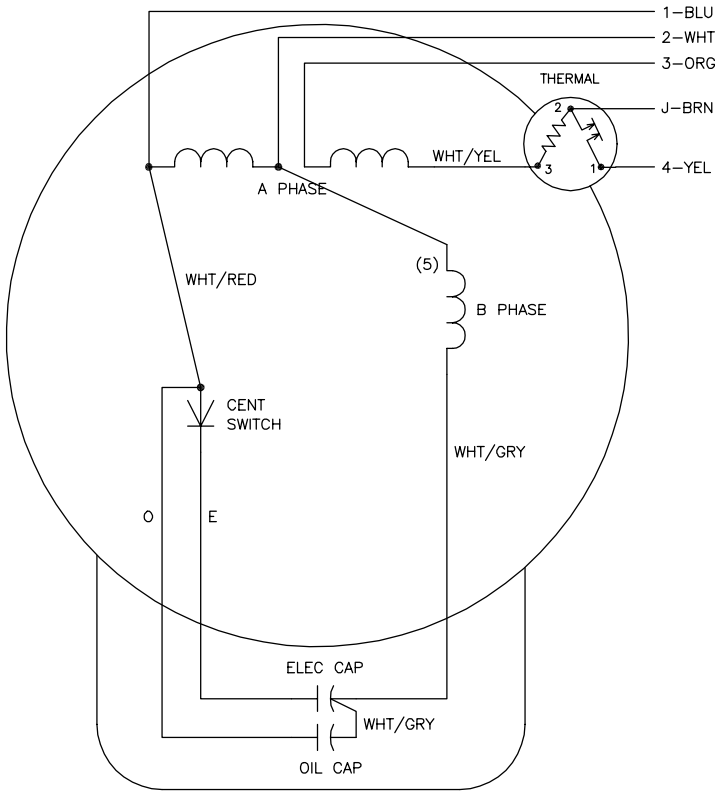

	LINE A	LINE B	JOIN	JOIN
HIGH	1	4	2,3	J
LOW	1,3	4	–	2,J

NOTES:

1. CONNECTIONS ARE SHOWN FOR CCW ROTATION FACING END OPPOSITE SHAFT EXTENSION (STD). FOR CW ROTATION, INTERCHANGE 5 AND 8 INTERNALLY.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: ADDED CM PLANT CODE ONLY			BALDOR ELECTRIC Co.
REV. LTR: E	BY: TWD	REVISED: 09:39:48 10/24/2001	TDR: 253023
CD0308		FILE: AAA00007481	REF: CD0308
		MTL: –	TYPE LC, DV, FIX, THERMAL, B PH AMPS THRU HTR, 5 LEADS

CD0308