PerformancePro
PROUDLY BUILT IN THE USA SINCE 2000 PUMPS


PerformancePro Pumps Engineering Data Packet


Pump:


Series:	AP Low Speed
Pump Model:	AP-3/4-105
Design:	Self Priming
Inlet:	3 inch
outlet:	3 inch
Impeller:	AP3/4L
Trim:	5.15
Fluid:	Water


Motor:


Motor Number:	APM-347
Manufacturer:	Baldor
Rated HP:	0.75
Total HP:	1.01
Speed:	1750
Enclosure:	TEFC
Frame:	56Y (Square Flange)
Volts:	115/230
Phase:	1
Frequency:	60
Amps At Total HP:	9.4/4.7

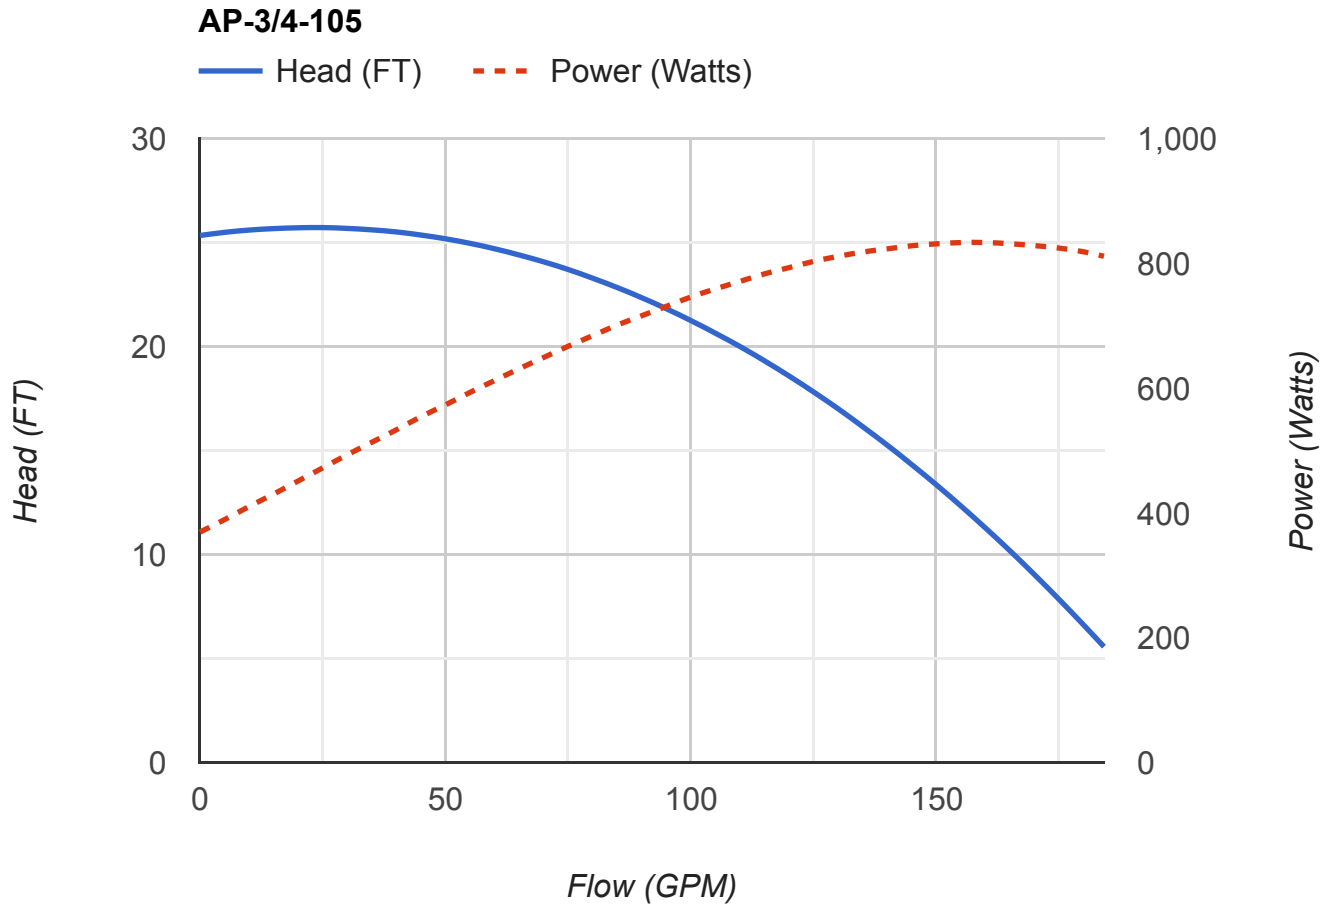

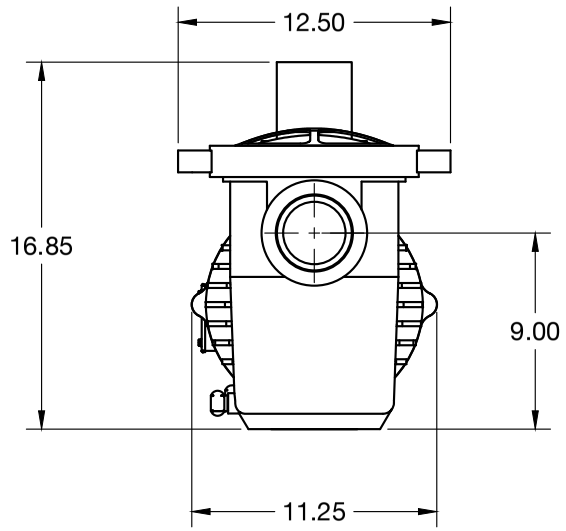

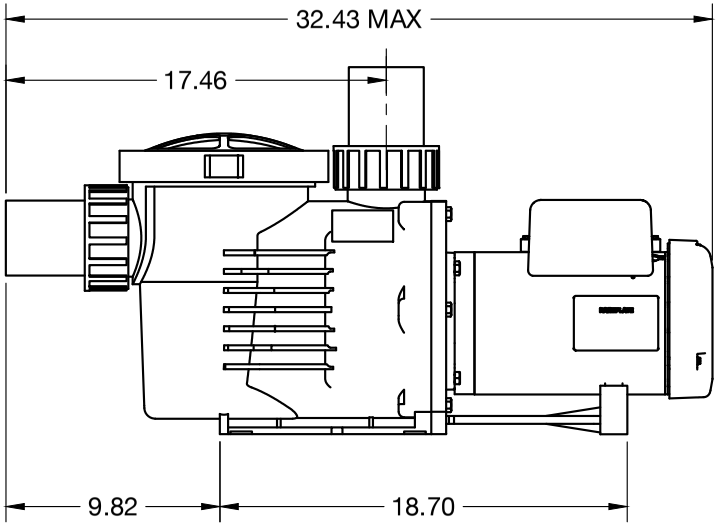


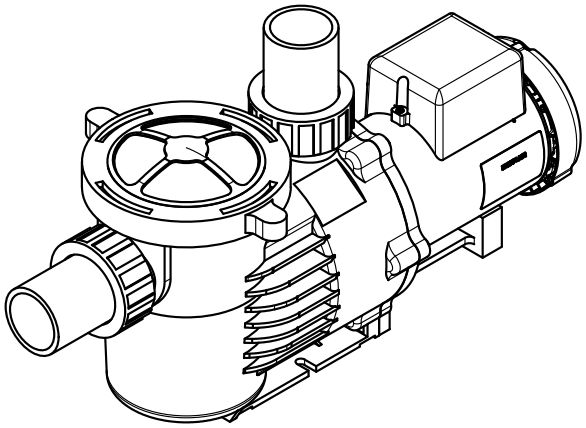

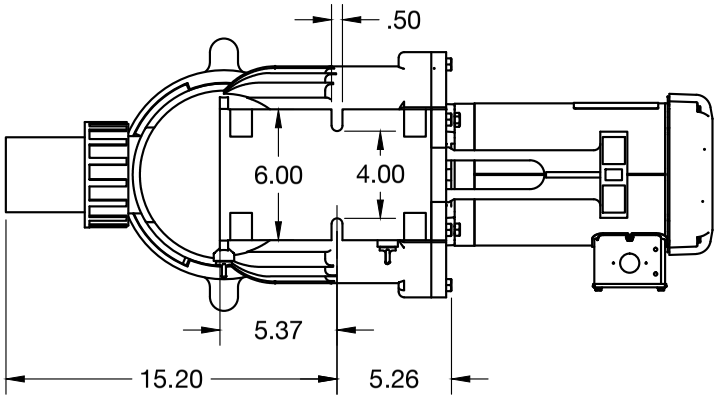

PerformancePro PROUDLY BUILT IN THE USA SINCE 2000 PUMPS	Artesian Pro Low Speed			
	THP: 0.68HP THRU 1.35HP			
Greg Gent	1:7	3/23/21	A3T001312	00

35LYT286

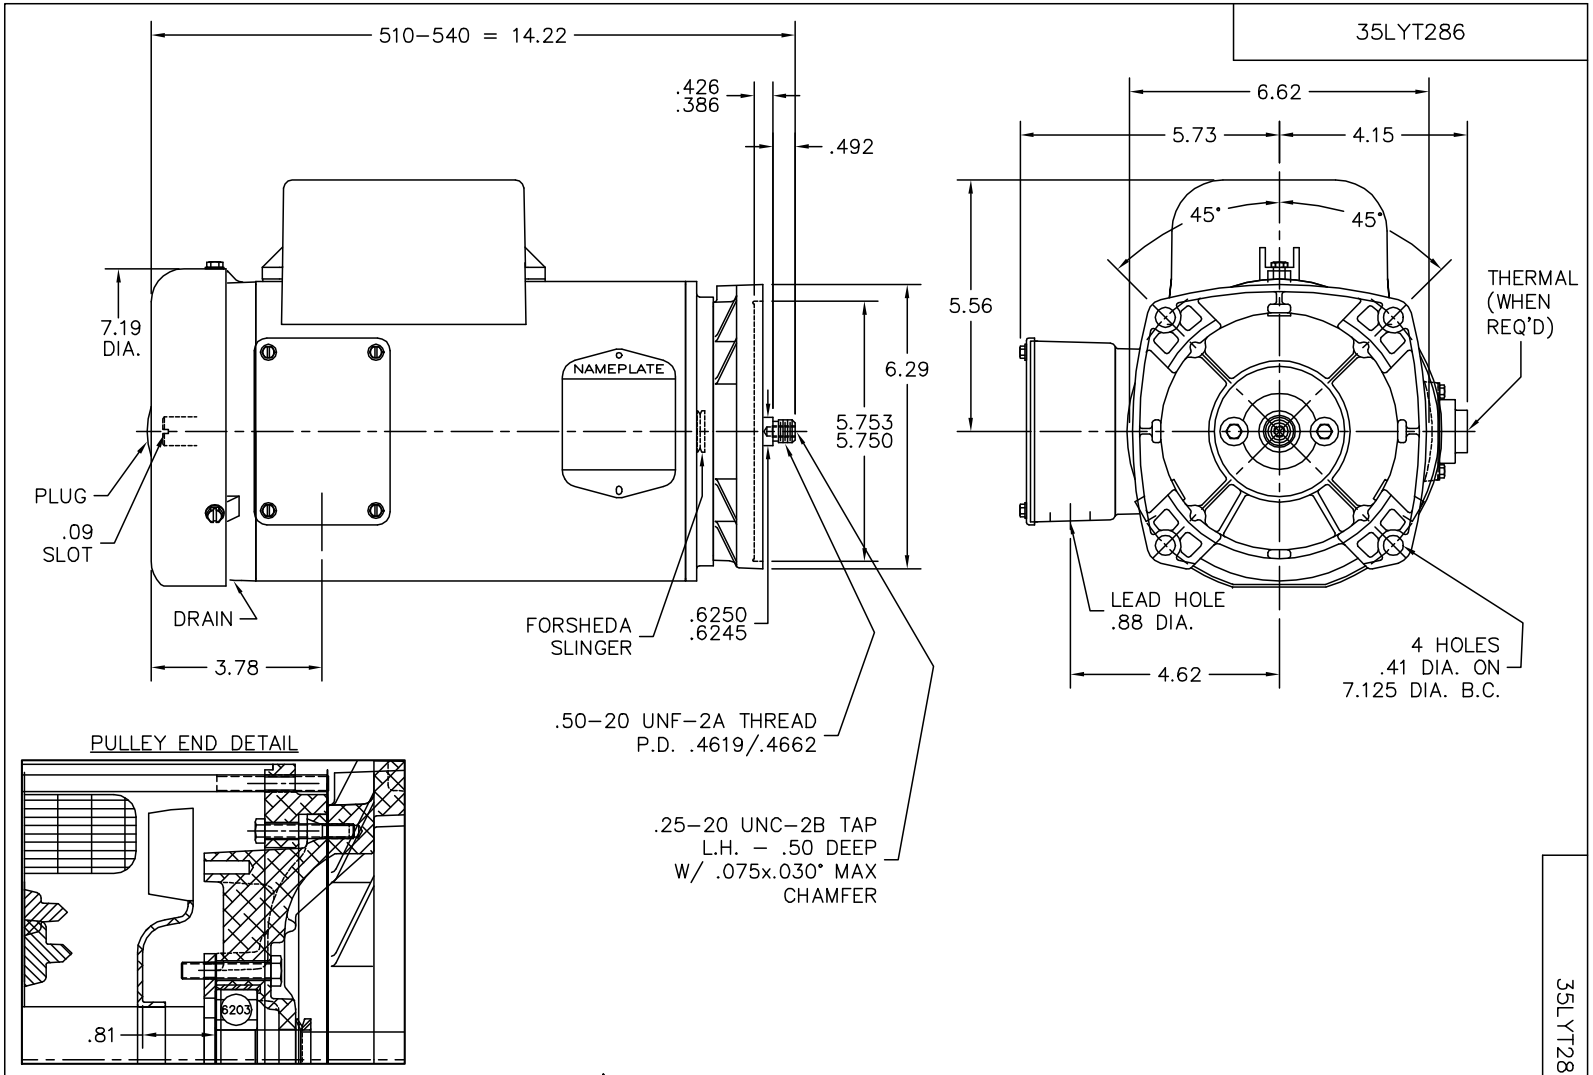

PULLEY END DETAIL

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: REPLACE ENDPLATES		
REV. LTR: E	VERSION: 05	TDR: 000001063670
FILE: \AAA\00101\071	REVISED: 02:00:41 03/09/2018	BY: FGCHAH1
MTL: –		


BALDOR

VERT 56YZ TEFC 35LC POOL PUMP W/SLINGER

SH 1 of 1

35LYT286

CD0308

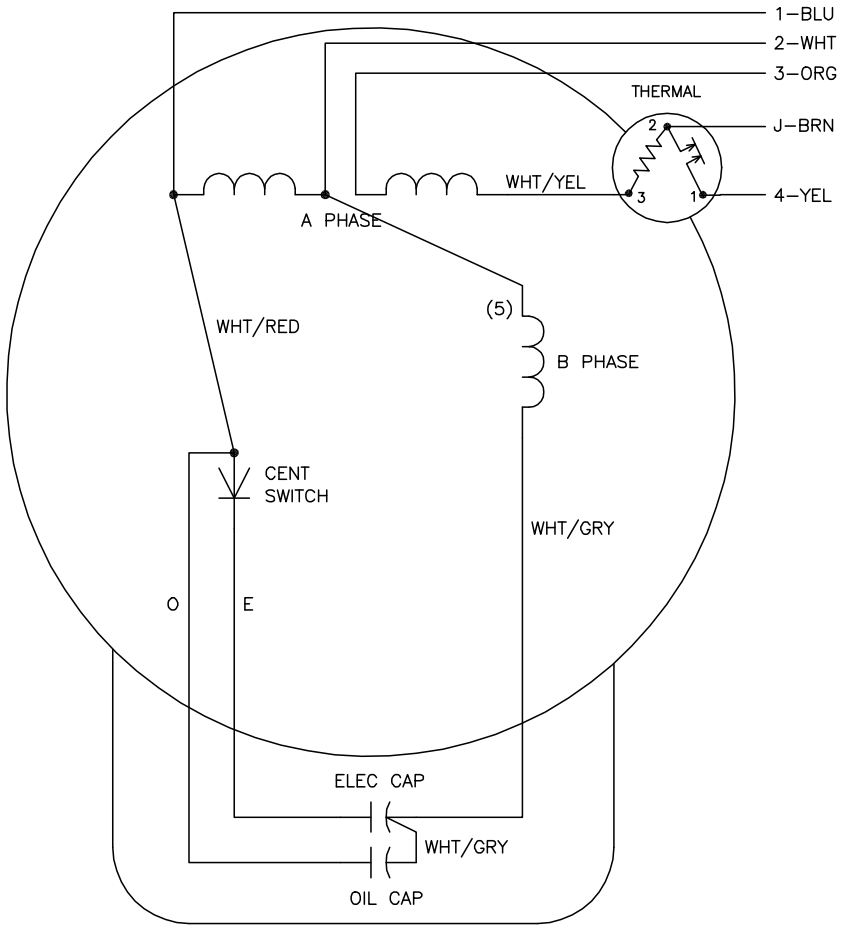

	LINE A	LINE B	JOIN	JOIN
HIGH	1	4	2,3	J
LOW	1,3	4	–	2,J

NOTES:

1. CONNECTIONS ARE SHOWN FOR CCW ROTATION FACING END OPPOSITE SHAFT EXTENSION (STD). FOR CW ROTATION, INTERCHANGE 5 AND 8 INTERNALLY.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: ADDED CM PLANT CODE ONLY			
REV. LTR: E	BY: TWD	REVISED: 09:39:48 10/24/2001	TDR: 253023
CD0308		FILE: AAA00007481	REF: CD0308
		MTL: –	

BALDOR ELECTRIC Co.

TYPE LC, DV, FIX, THERMAL, B PH AMPS THRU HTR, 5 LEADS

CD0308